

CASADECK

Heavy Duty Tiles




600x600mm

15MM THICKNESS

Casa
FULL BODY TILES

TABLE OF CONTENTS

Concept	03
Size & Surface	04
Application	04
User Guide	05
Product Range	06
Installation System	25
Certification	30
Technical Specification	31
Tile Cleaning	31
Casa All Collection	33

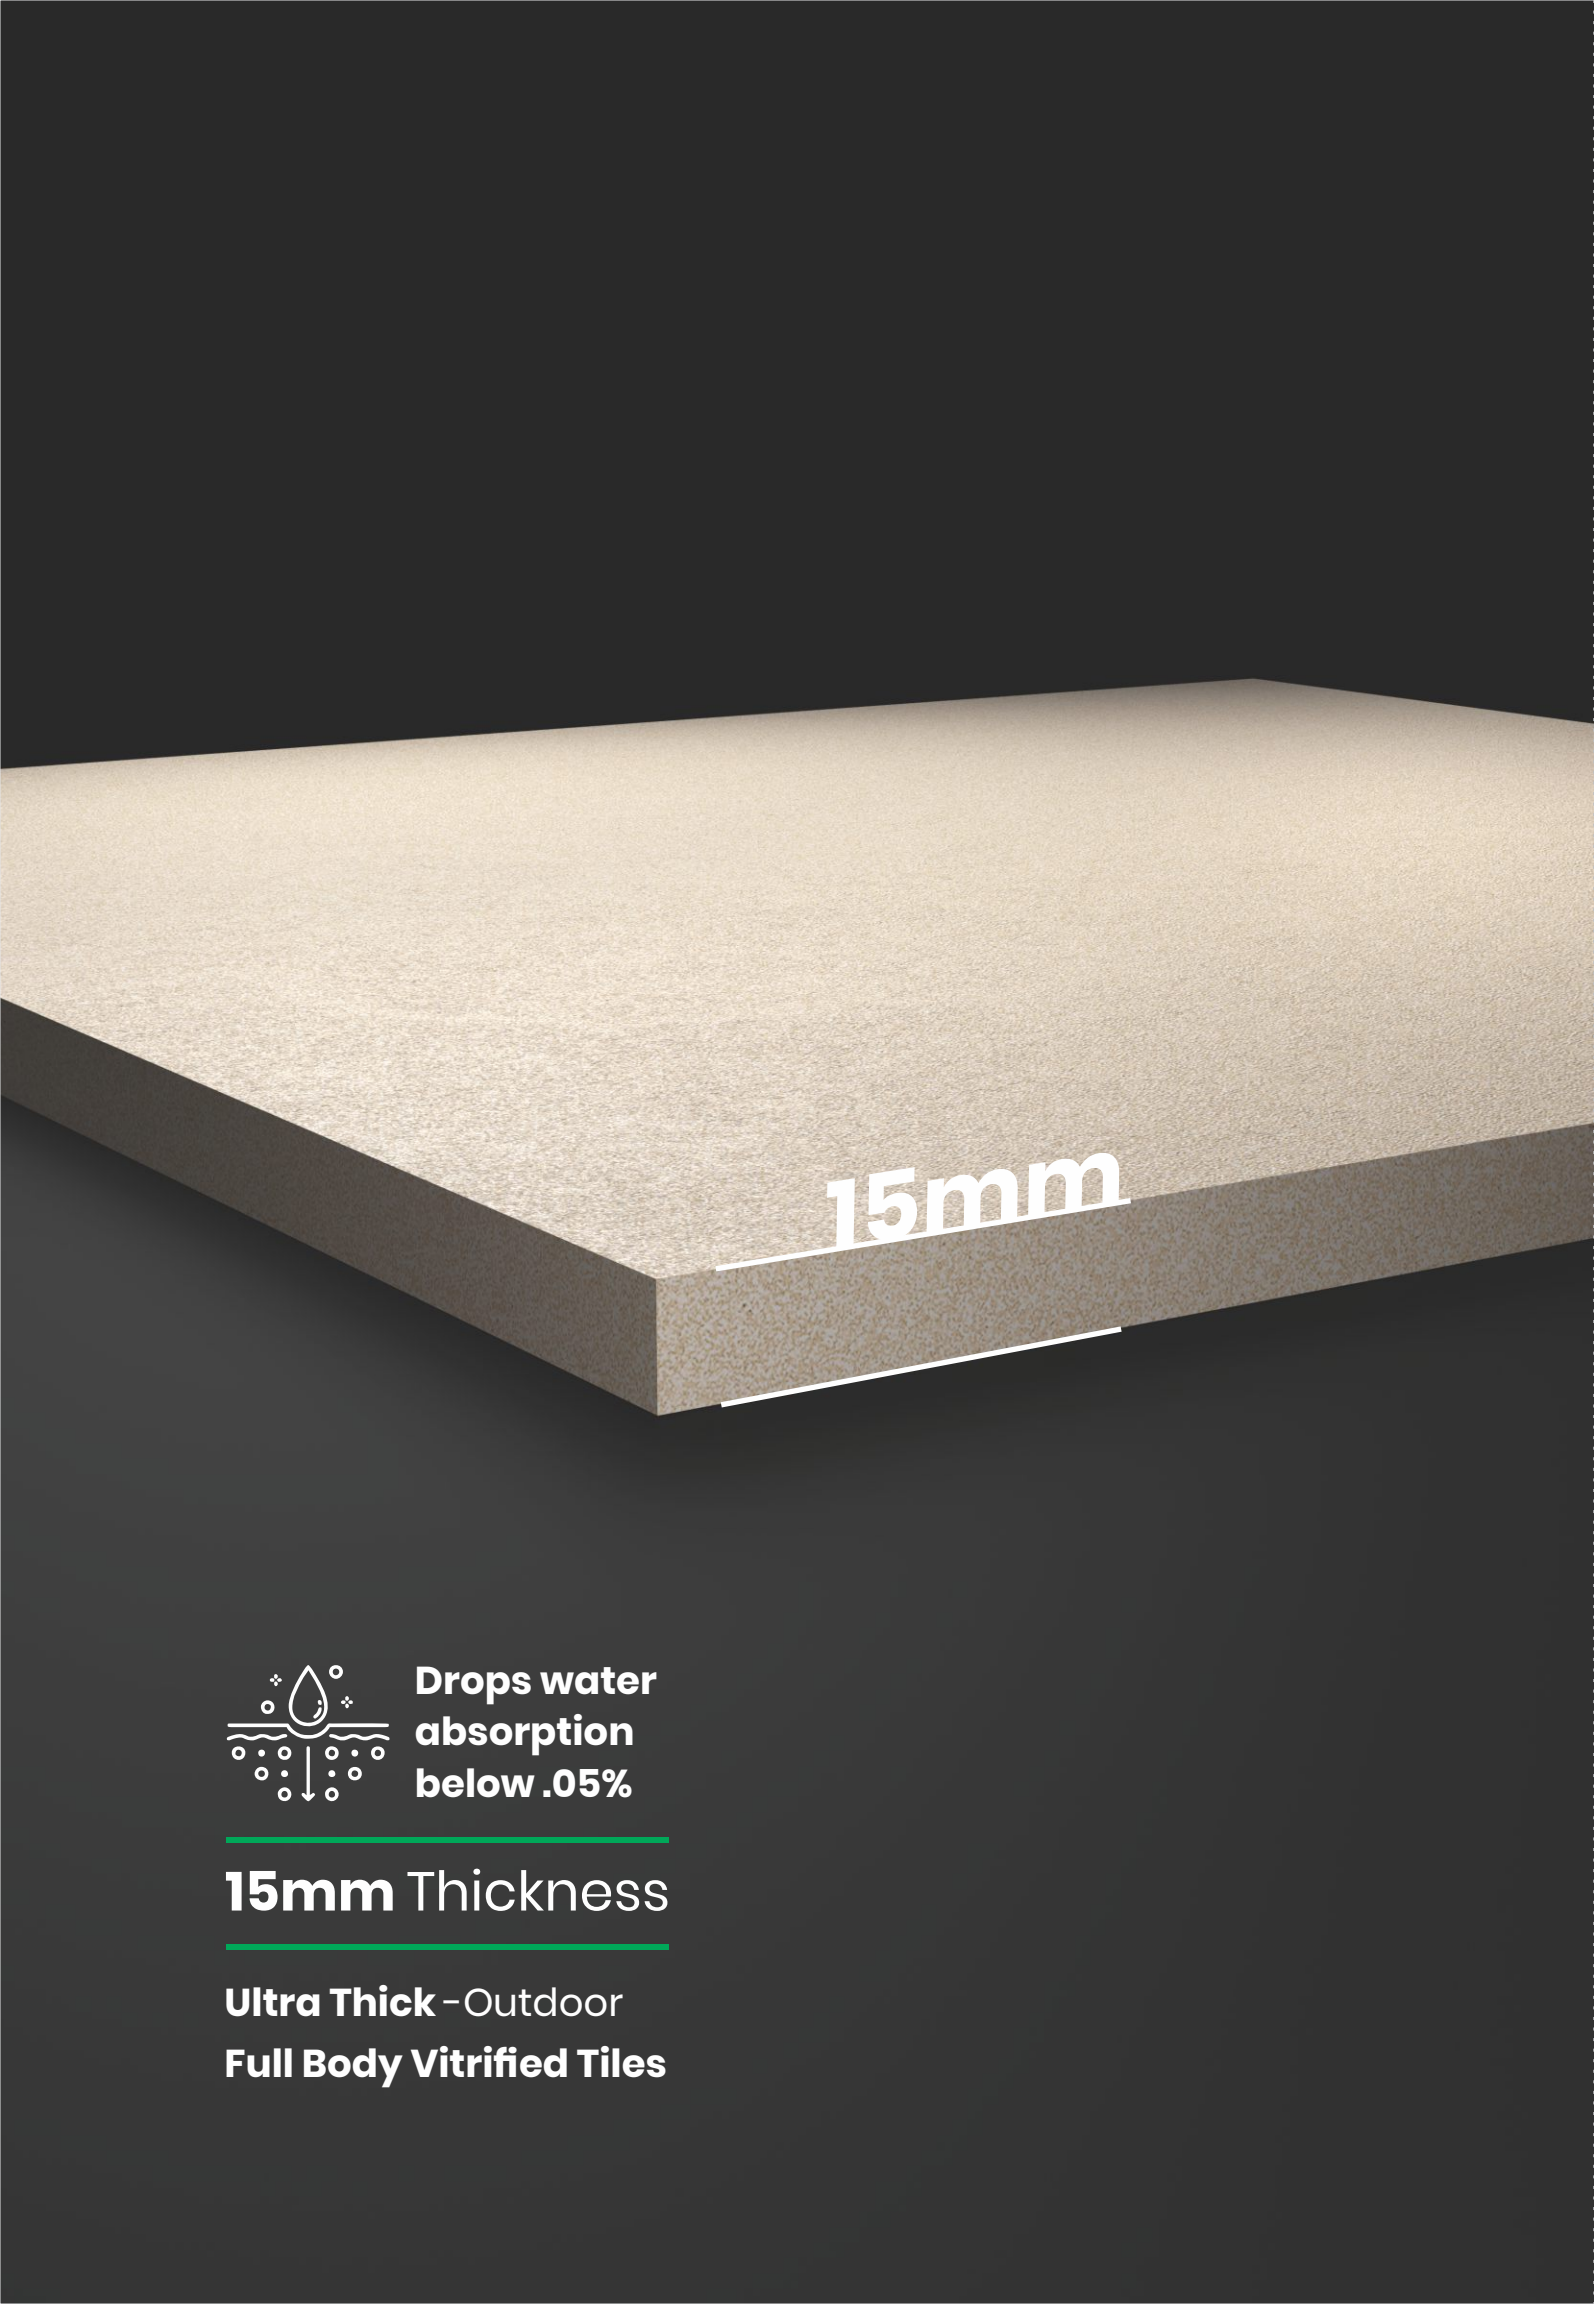

**Drops water
absorption
below .05%**

15mm Thickness

**Ultra Thick - Outdoor
Full Body Vitrified Tiles**

CASADECK
Heavy Duty Tiles

■■■■■
CONCEPT

One of the most important conditions to create aesthetic and functional area is to choose materials suitable for the surfaces. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

“CASADECK” Heavy Duty Full Body Vitrified Tiles can be safely used in all internal and external spaces that are exposed to high load, water area, patios, landscape and pedestrian traffic. With luxury Concept develop in a variety of designs with amazing the ‘Anti-Skid Surface’ put this 15mm category high on versatility, without compromising the contemporary style.

CASADECK is designed to meet the latest architecture and interior design needs.

SIZE AND SURFACE

Available size :



Available thickness:

15mm Thickness

Surface :

3

The Casadeck collection are available in two punches making it feasible to install them in outdoor as well as heavy pedestrian area to create an appropriate ambience. These tiles are available in single format with single thickness to choose from making this collection suitable for all kind of applications from floor to pathways and water body area.


ROCK PUNCH



BLAST PUNCH




APPLICATION AREA

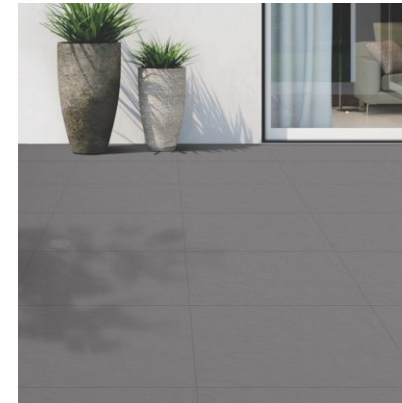

Courtyard Area



Heavy Traffic Area

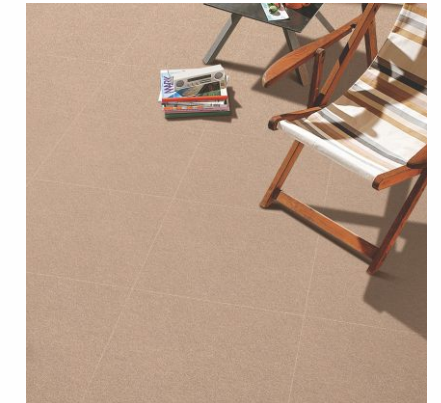


Outdoor Area



Pool Area



Pathways

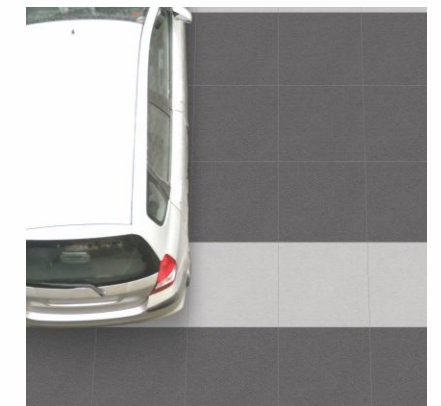

Parking Area









By beautifying the indoors and outdoors. The casadeck collection comes in multiple format with various shades of color, which make it highly suitable for all kinds of spaces. Along with being a perfect fit, this collection will also uplift the ambience of your space.

THE ANTI-SKID SURFACE




The anti-skid surface is the result of increasing demand of fullbody tile for the high performance environment due to its popularity in various uses and applications. Main candidates for antiskid surface are wet areas that are exposed to moisture and water. The finish has an amazing ability to roughen the tile surface without changing its design.

THE TECHNICAL BENEFITS


- | | |
|---|--|
|  Impact Resistant |  Stain Resistance |
|  Scratch Resistant |  UV Resistance |
|  Liquid Repellent |  Anti Alga |
|  Frost & Fire Resistance |  Anti-Slip |

INSTALLATION SYSTEM

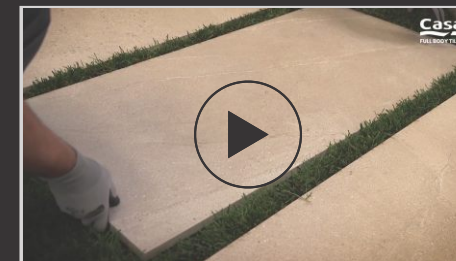


DRYING LAYING ON GRASS

It is as easy it seems. Carve about 2 inches of soil and pour some gravel to make a proper bed. Then lay your Casadeck tiles on top of it.

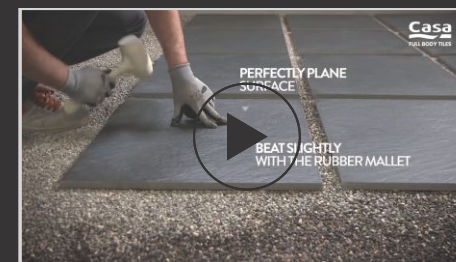

LAYING ON GRAVEL

Make sure your ground is compact and levered. Install them as desired giving a generous joint between Casadeck tiles.

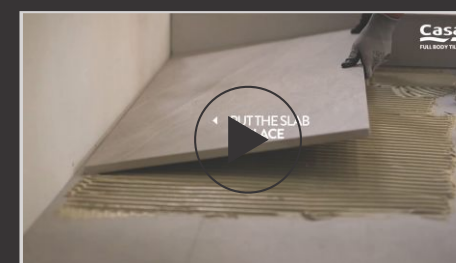

OUTDOOR LAYERS ON RAISED FLOORING

Our Casadeck tiles can be easily installed on raised floor system to provide drainage of rain water. Just ensure that the area can support the weight.



LAYING ON SCREED WITH ADHESIVE








It is as easy it seems. Carve about 2 inches of soil and pour some gravel to make a proper bed. Then lay your Casadeck tiles on top of it.

PRODUCT RANGE

600x600mm

TYPE : SOLID COLOR



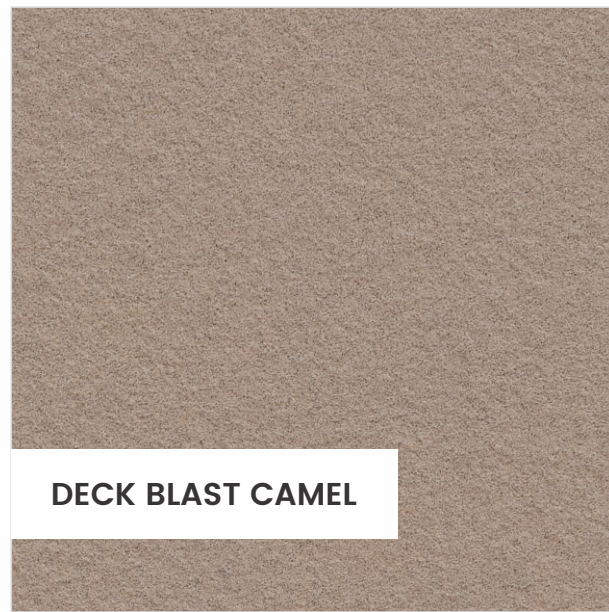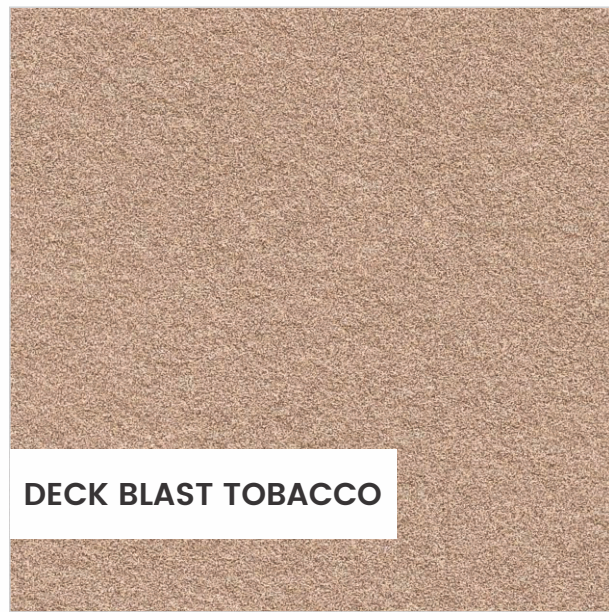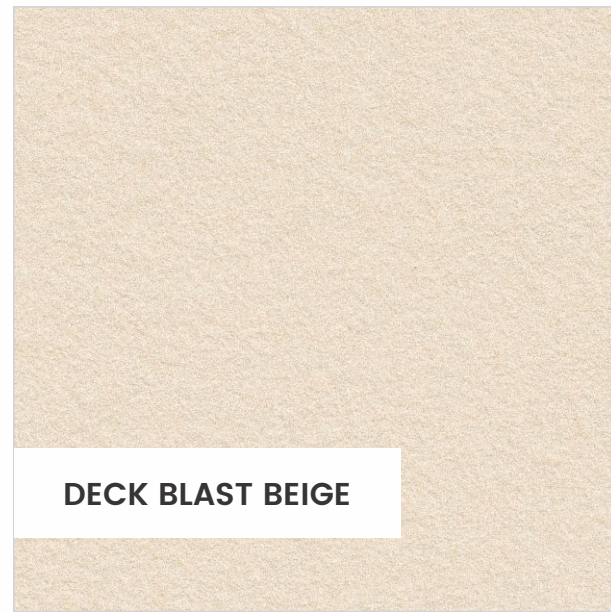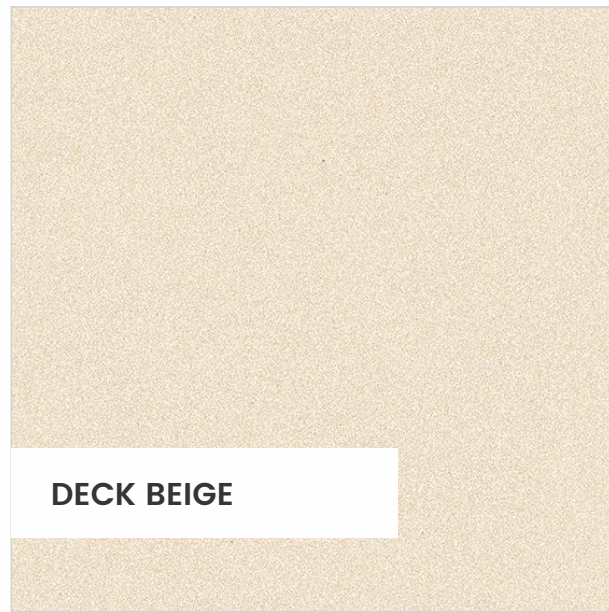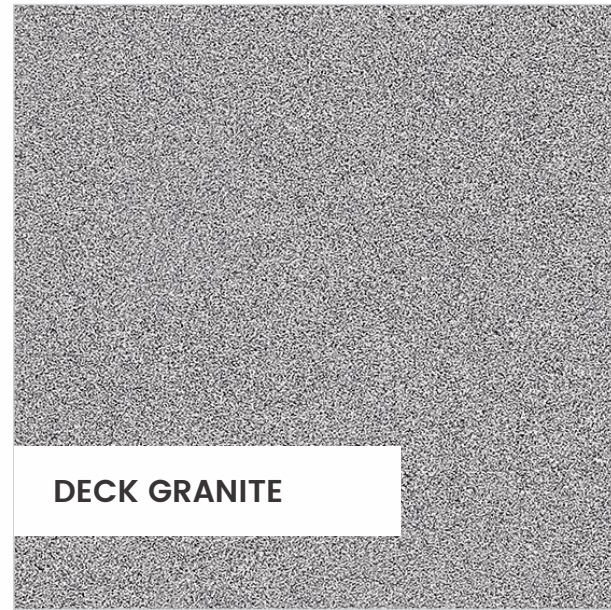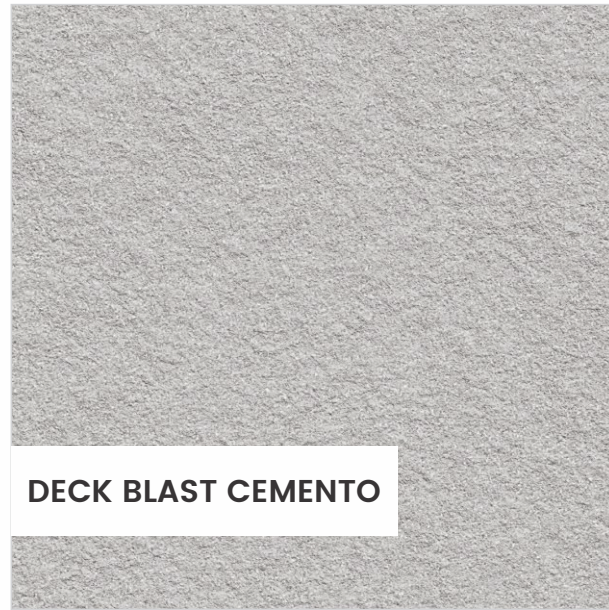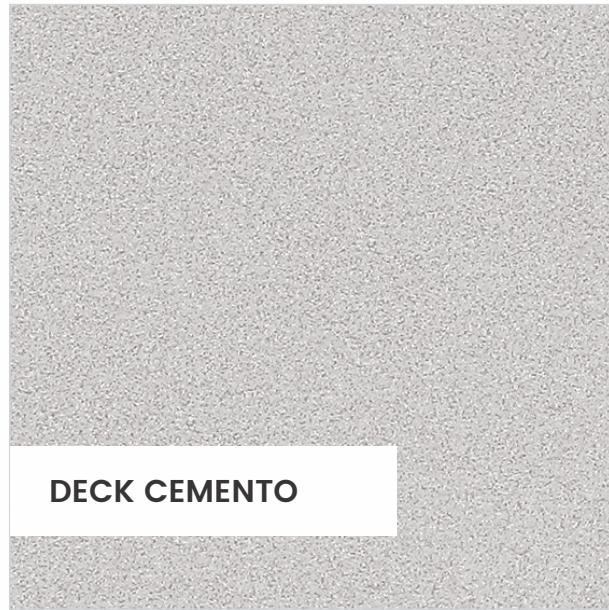




CASADECK
Heavy Duty Tiles

**DECK
GRIGIO**

CLICK HERE 
For
360°
VISUAL

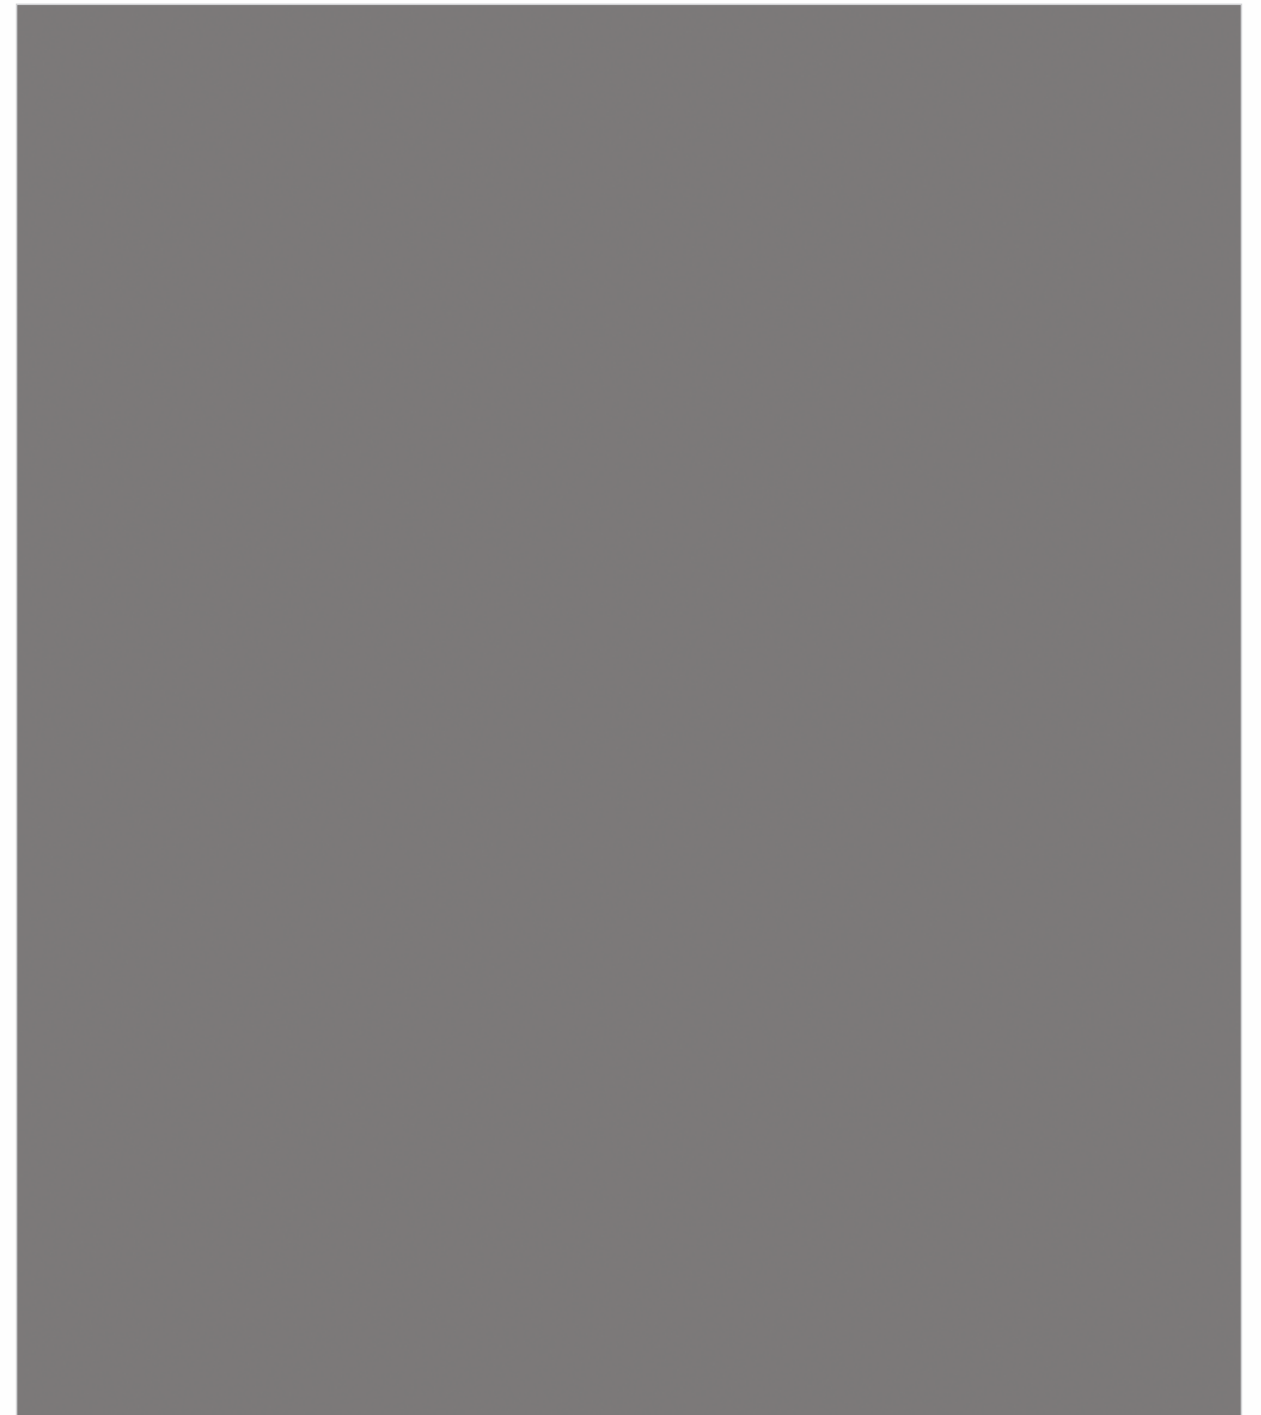

Category :
Light

Surface :
Anti-skid

Thickness :
15mm

**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
ROCK GRIGIO**

CLICK HERE 
For
360°
VISUAL




Category :
Light

Punch :
Rock

Surface :
Anti-skid

Thickness :
15mm






CASADECK
Heavy Duty Tiles

**DECK
KOTA**

CLICK HERE 
For
360°
VISUAL

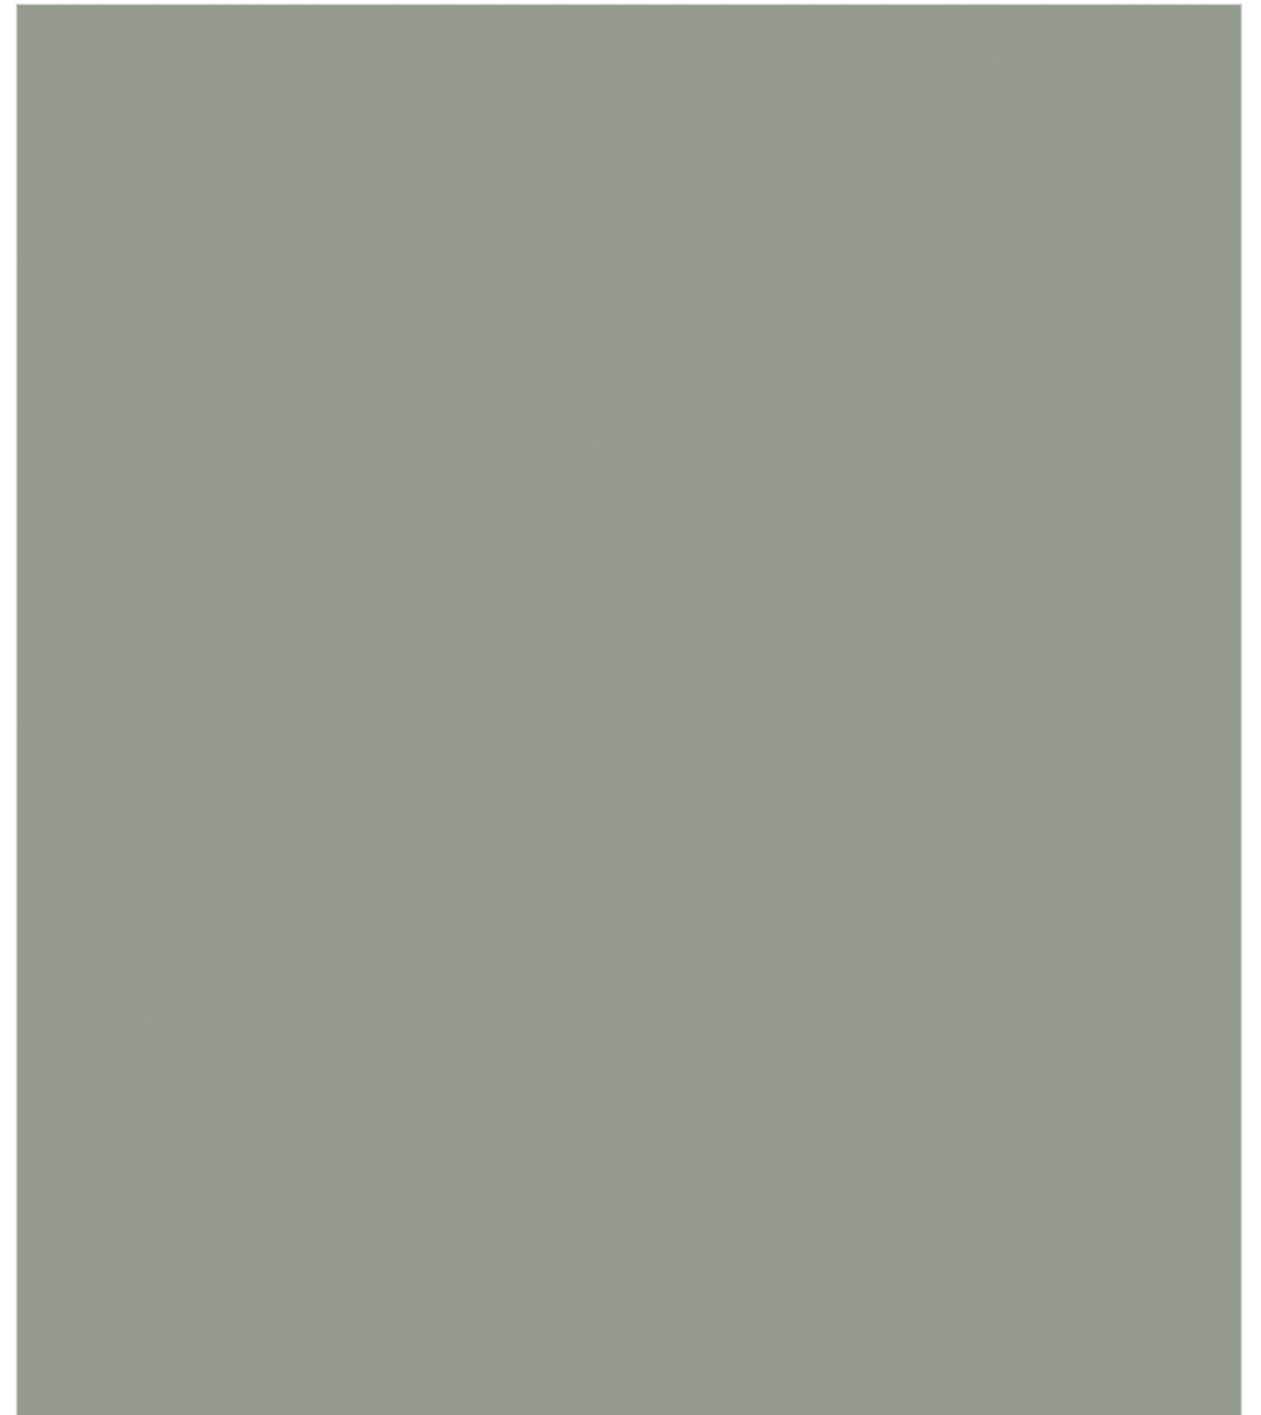

Category :
Light

Surface :
Anti-skid

Thickness :
15mm

**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
ROCK KOTA**

CLICK HERE 
For
360°
VISUAL



Category :
Light

Punch :
Rock

Surface :
Anti-skid

Thickness :
15mm


**600x
600mm**

600x1200mm in
15mm Thickness

First time in India



Finish : Deck Boost

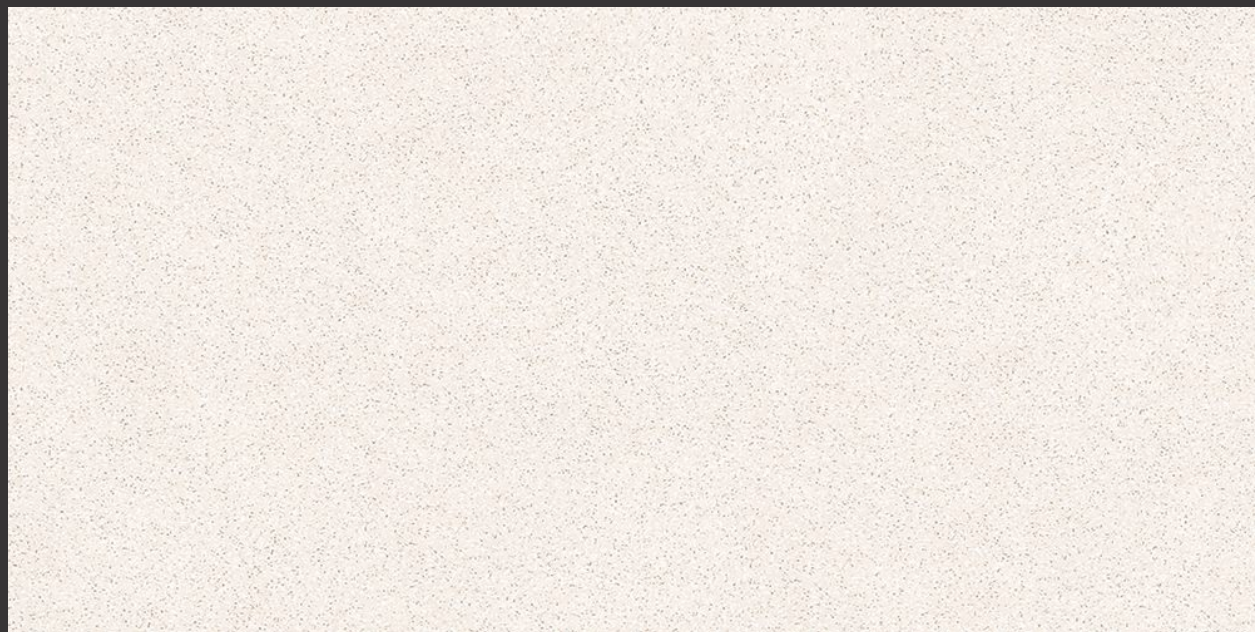

Finish : Deck Matt

THE KEY TO INDOOR AND OUTDOOR DESIGN_

Casadeck is inspired by rocks, metamorphic stones composed almost entirely of natural materials and small quantities of other minerals that create color changes and nuances. Such stones are typically suitable for the outdoors but can also be used indoors.





CASADECK
Heavy Duty Tiles

**DECK
CEMENTO**

CLICK HERE 
For
360°
VISUAL



Category :
Light

Surface :
Anti-skid

Thickness :
15mm


**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
BLAST CEMENTO**

CLICK HERE 
For
360°
VISUAL

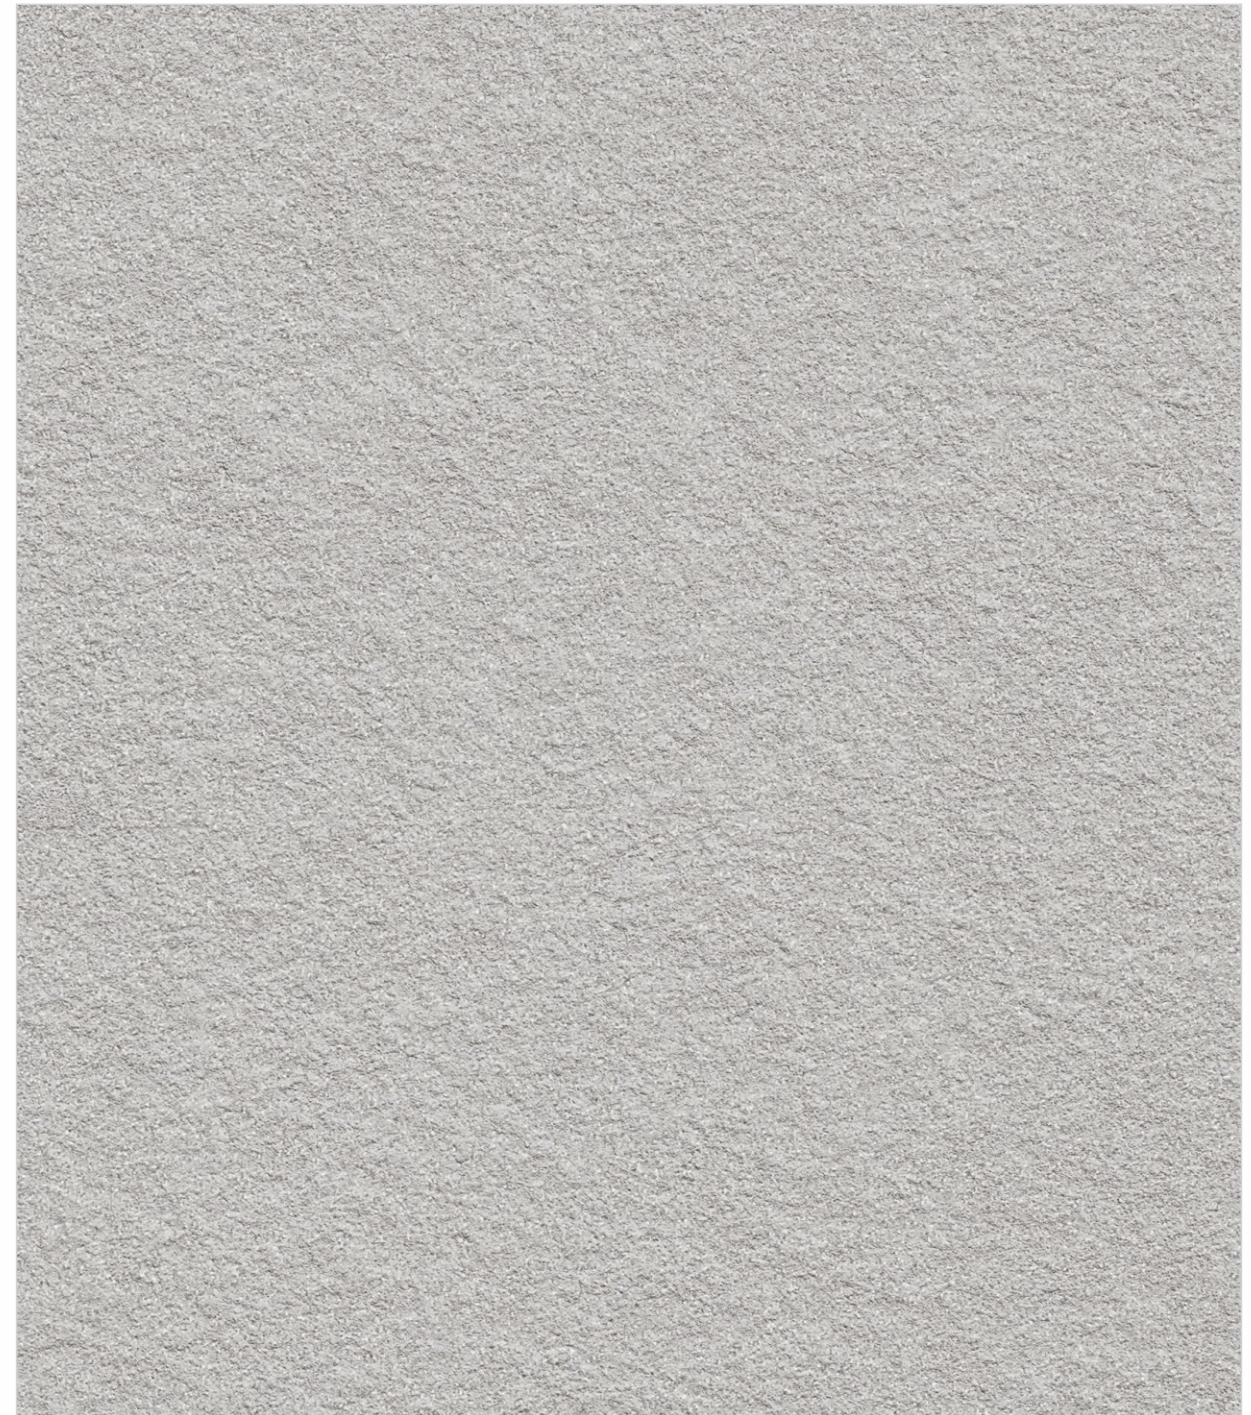


Category :
Light

Punch :
Blast

Surface :
Anti-skid

Thickness :
15mm






CASADECK
Heavy Duty Tiles

**DECK
GRANITE**

CLICK HERE 
For
360°
VISUAL

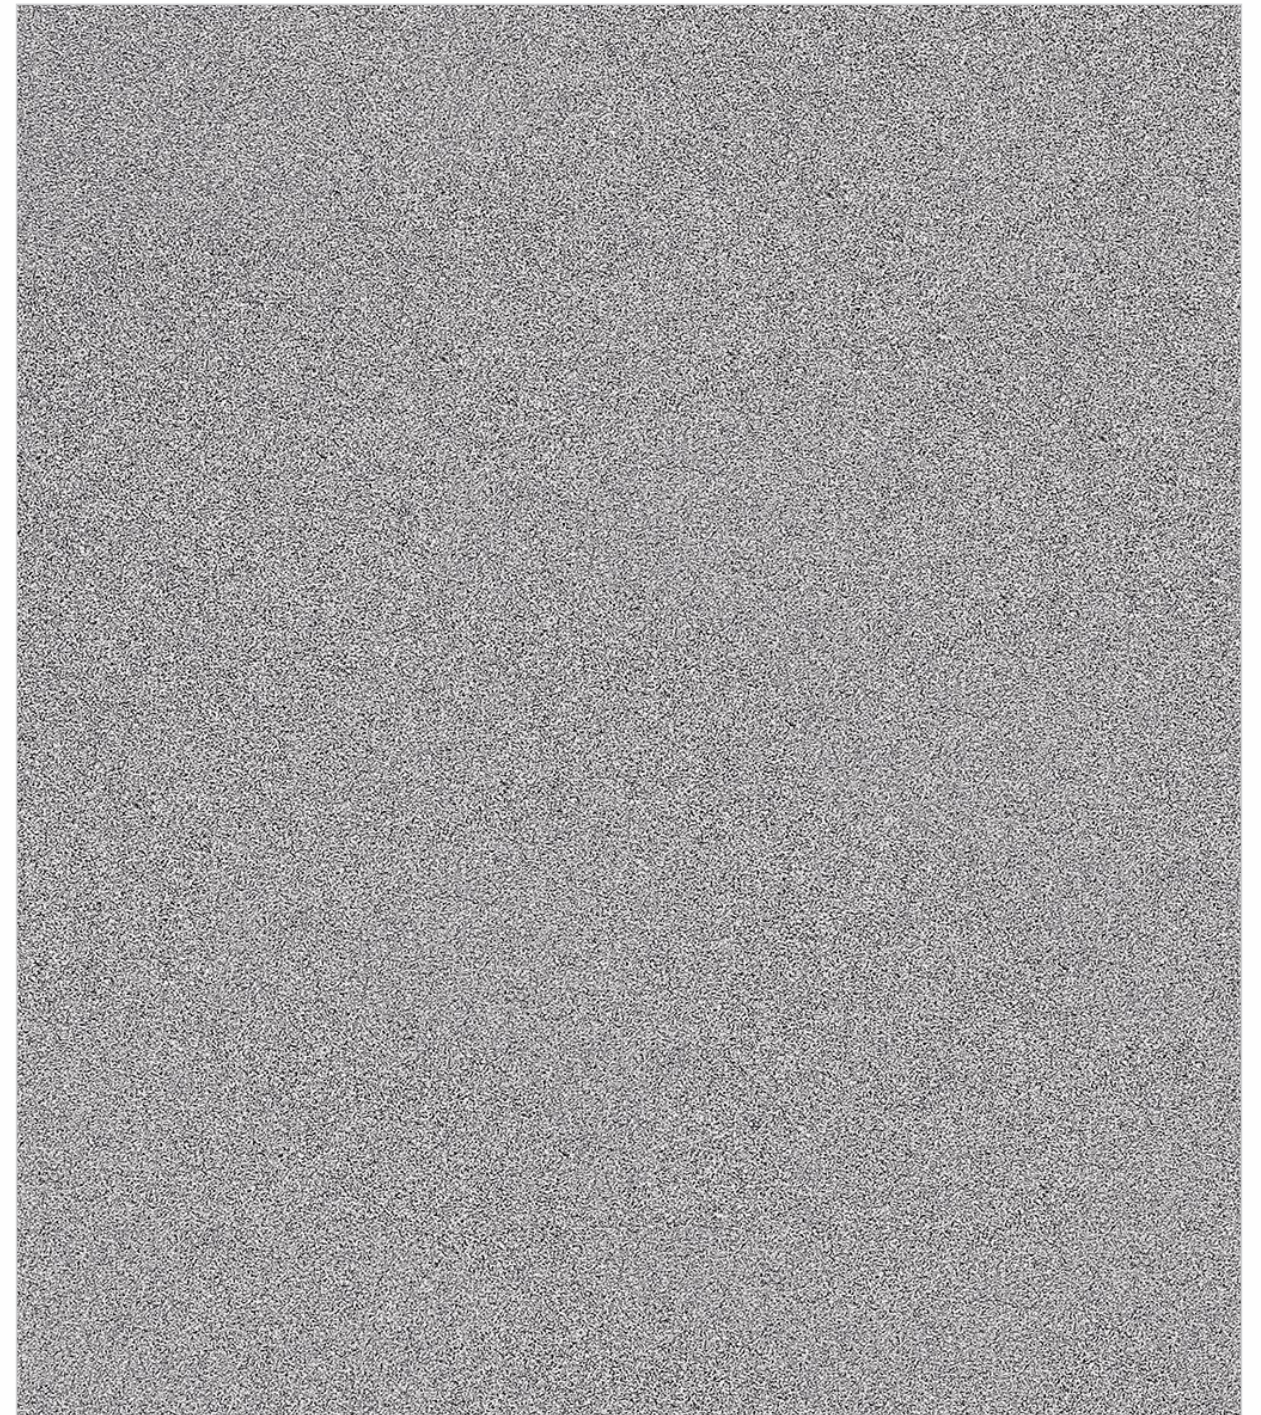

Category :
Light


Surface :
Anti-skid

Thickness :
15mm

**600x
600mm**



CLICK HERE 
For
360°
VISUAL

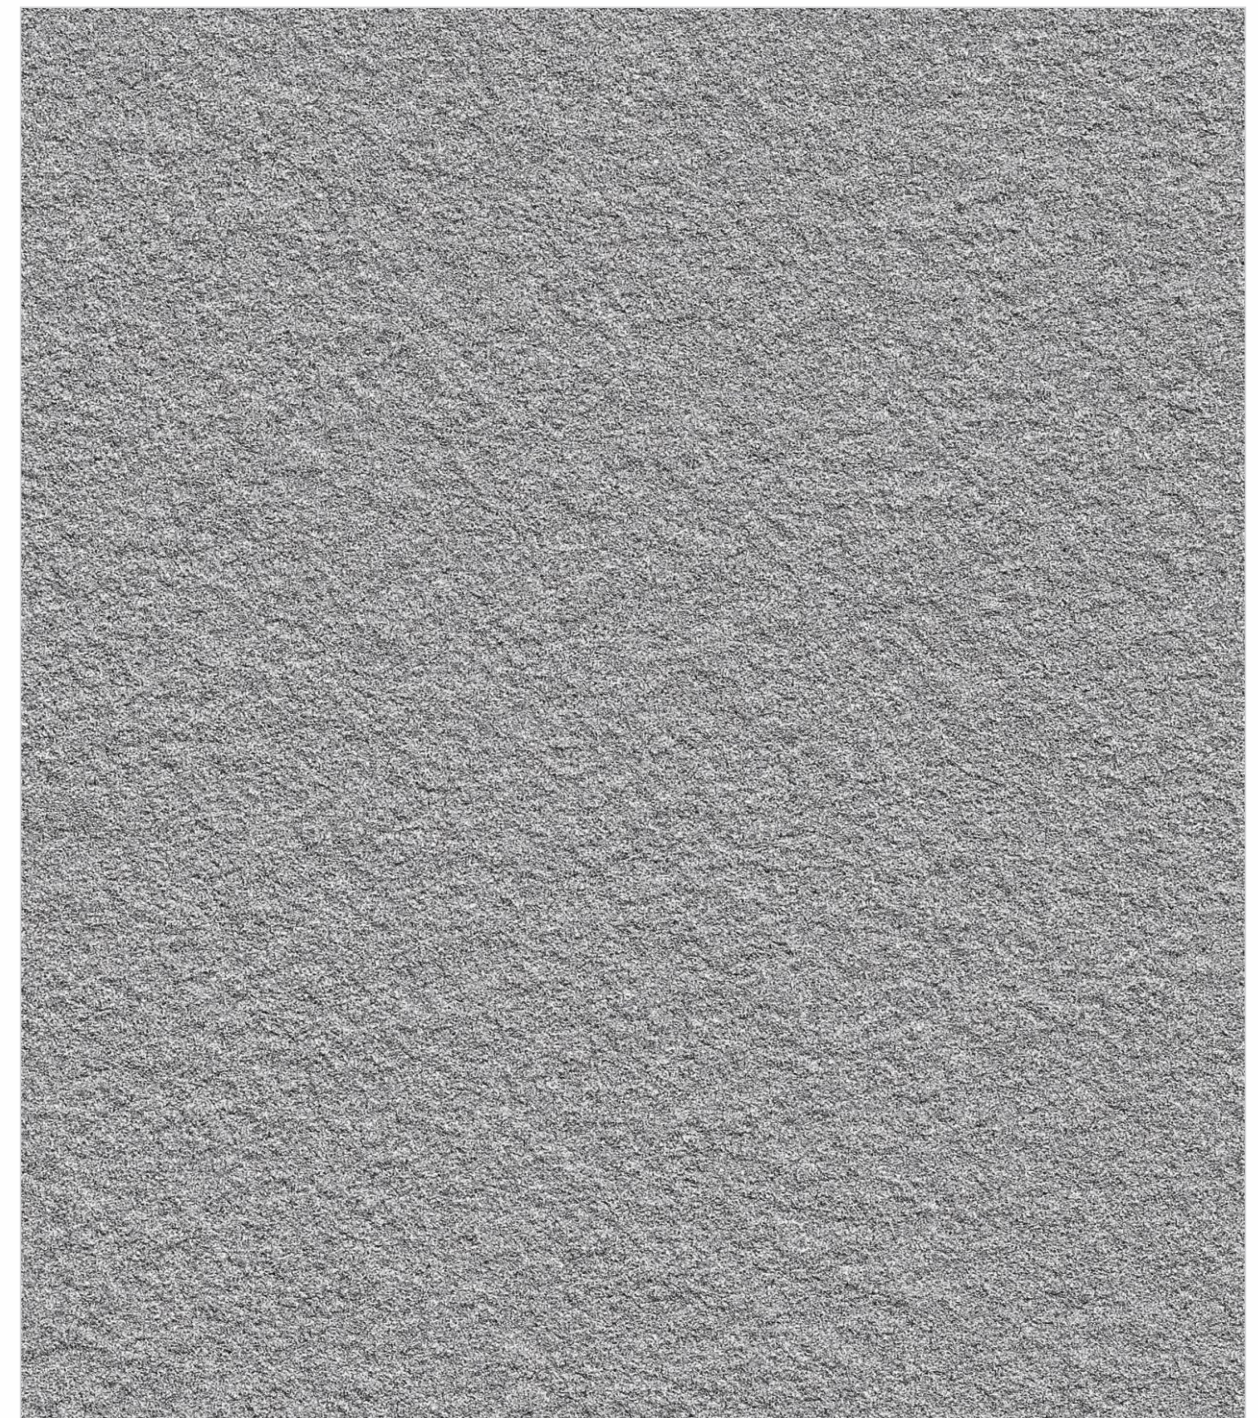

CASADECK
Heavy Duty Tiles

**DECK
BLAST GRANITE**


Category :
Light

Punch :
Blast

Surface :
Anti-skid

Thickness :
15mm


**600x
600mm**

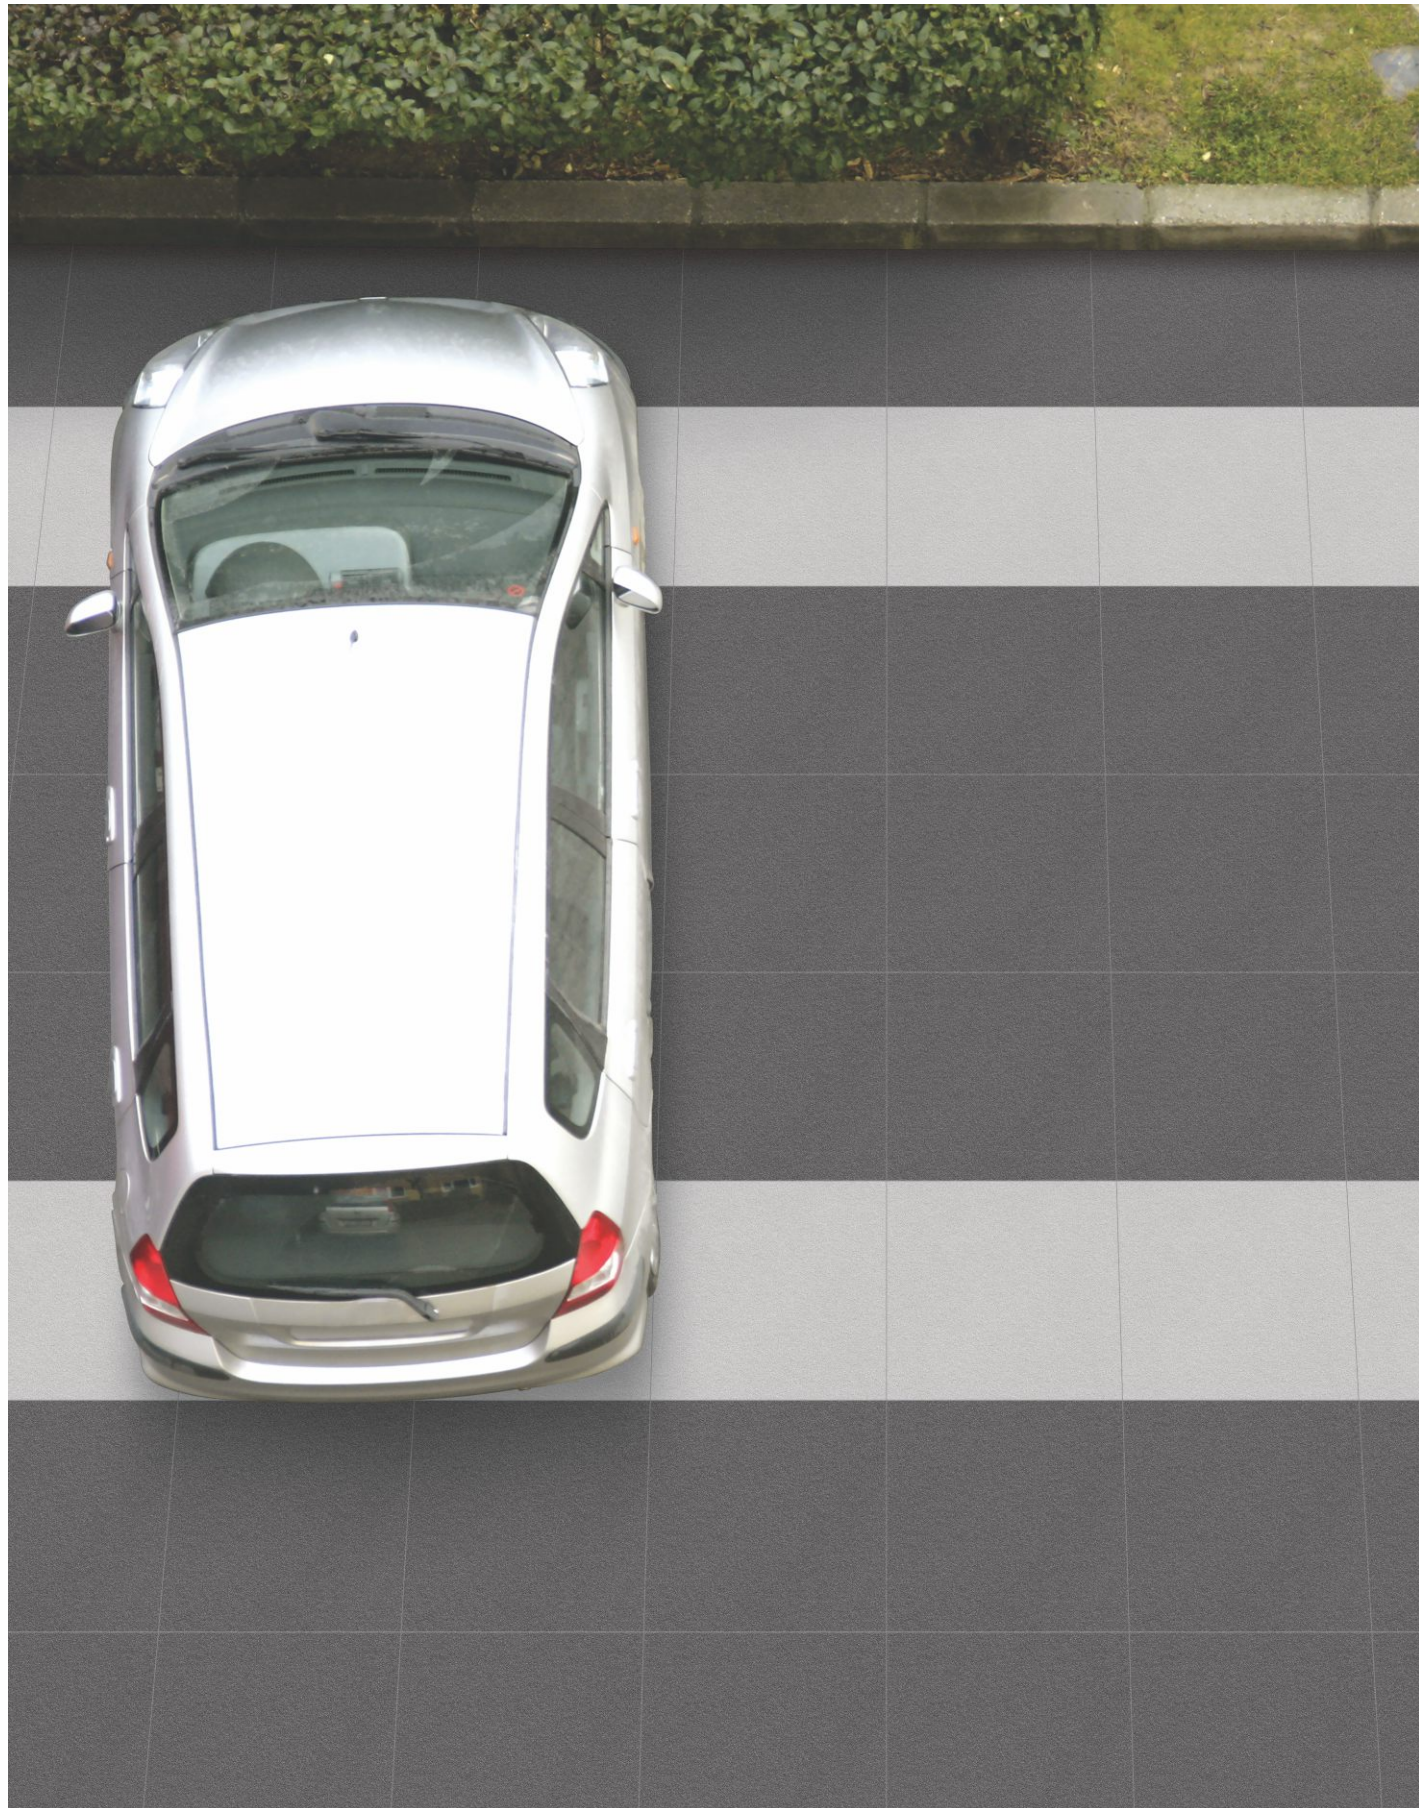

CASADECK
Heavy Duty Tiles

**DECK
BLAST COAL**

CLICK HERE 
For
360°
VISUAL

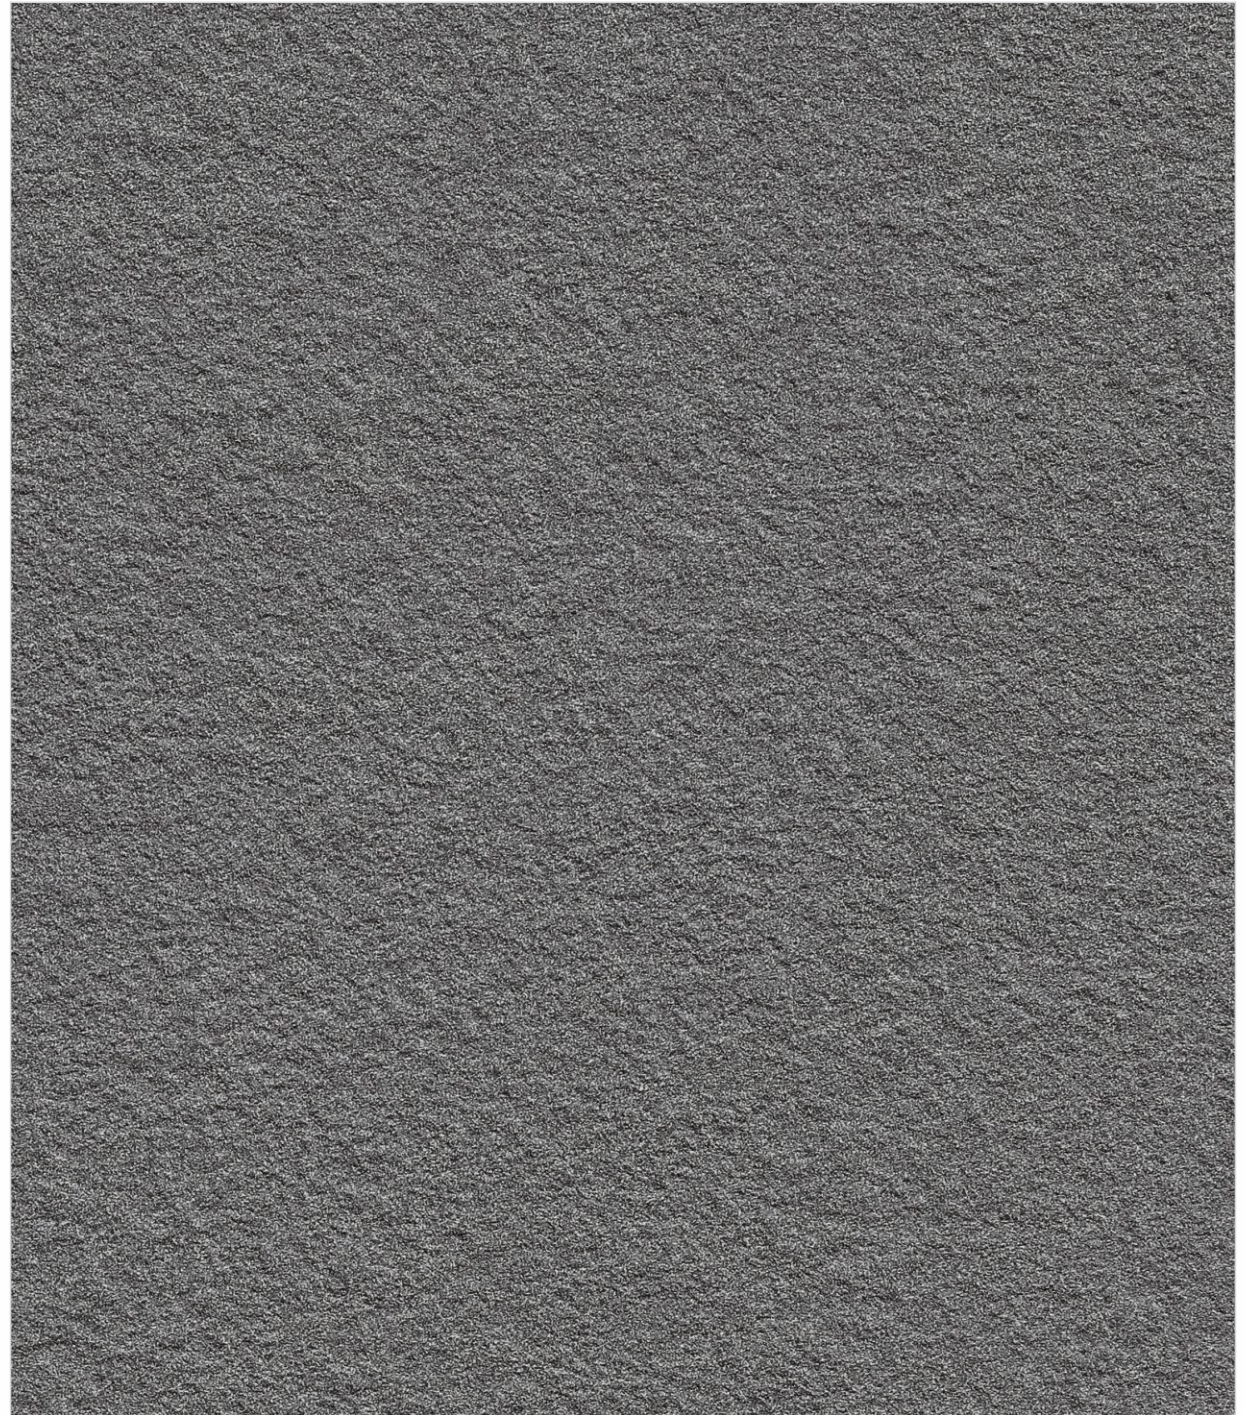


Category :
Dark

Punch :
Blast

Surface :
Anti-skid

Thickness :
15mm




**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
BEIGE**


CLICK HERE 
For
360°
VISUAL

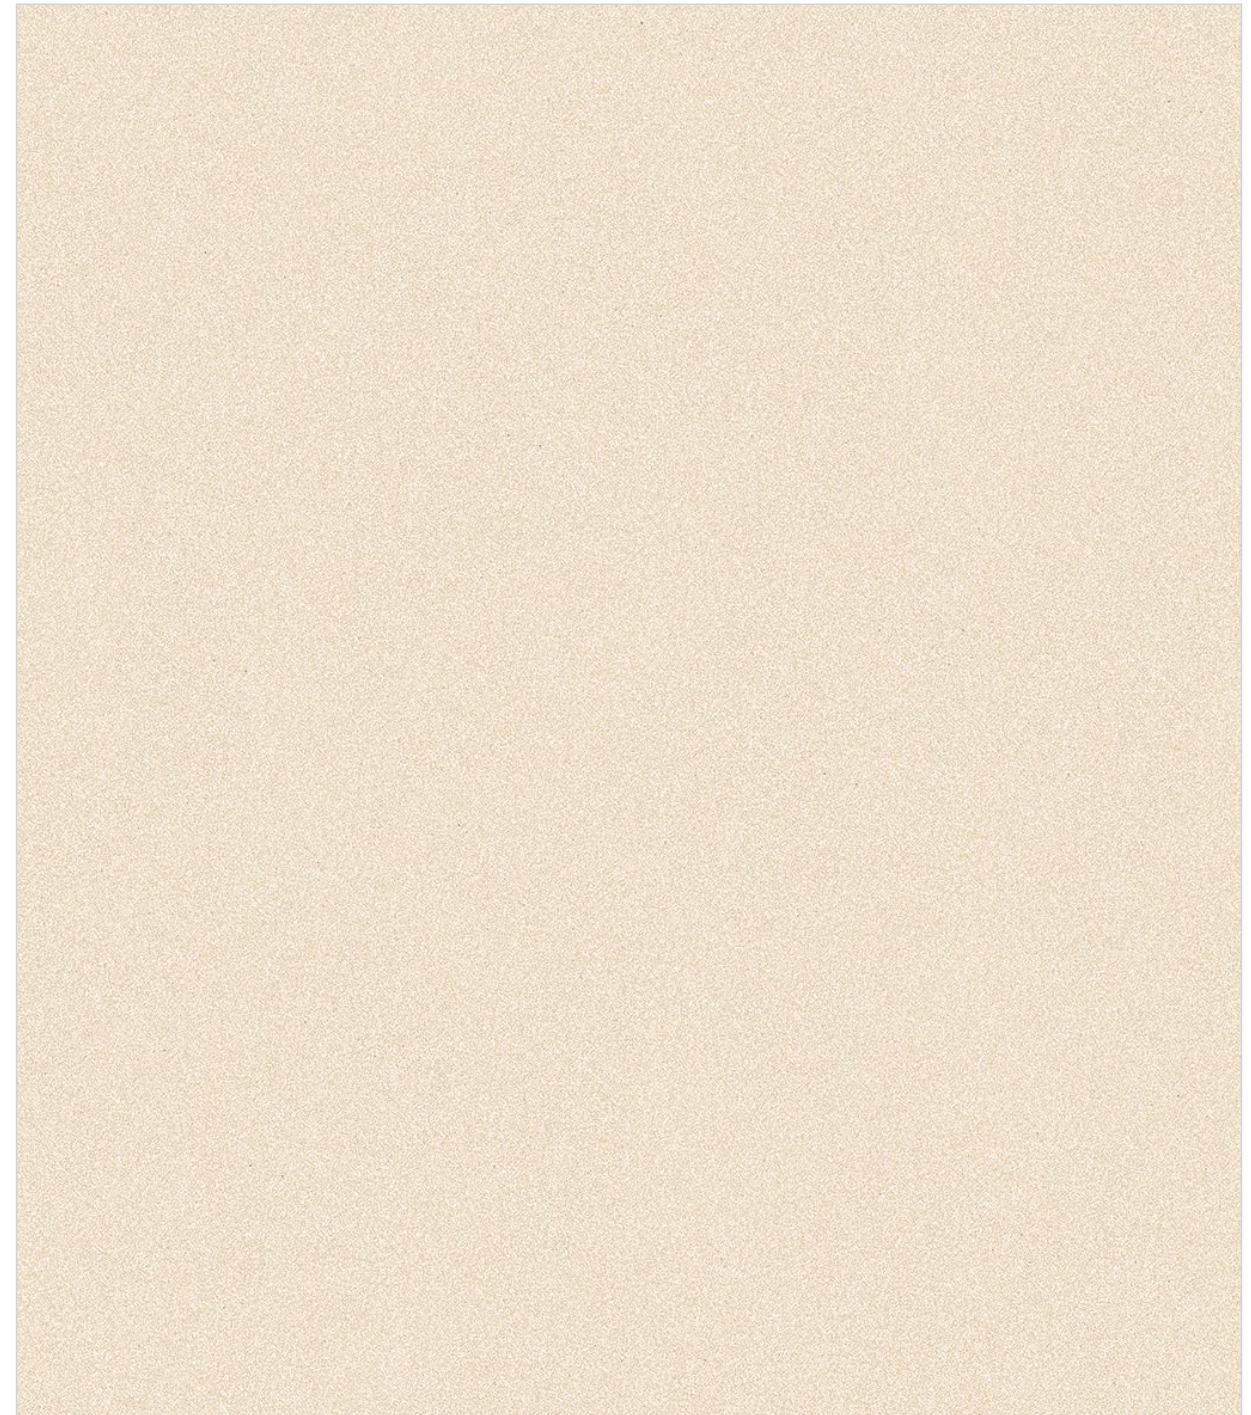

Category :
Light

Surface :
Anti-skid

Thickness :
15mm



**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
BLAST BEIGE**

CLICK HERE 
For
360°
VISUAL



Category :
Light

Punch :
Blast

Surface :
Anti-skid

Thickness :
15mm

**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
TOBACCO**

CLICK HERE 

For
360°
VISUAL



Category :
Dark

Surface :
Anti-skid

Thickness :
15mm


**600x
600mm**



CASADECK
Heavy Duty Tiles

**DECK
BLAST TOBACCO**

CLICK HERE 
For
360°
VISUAL

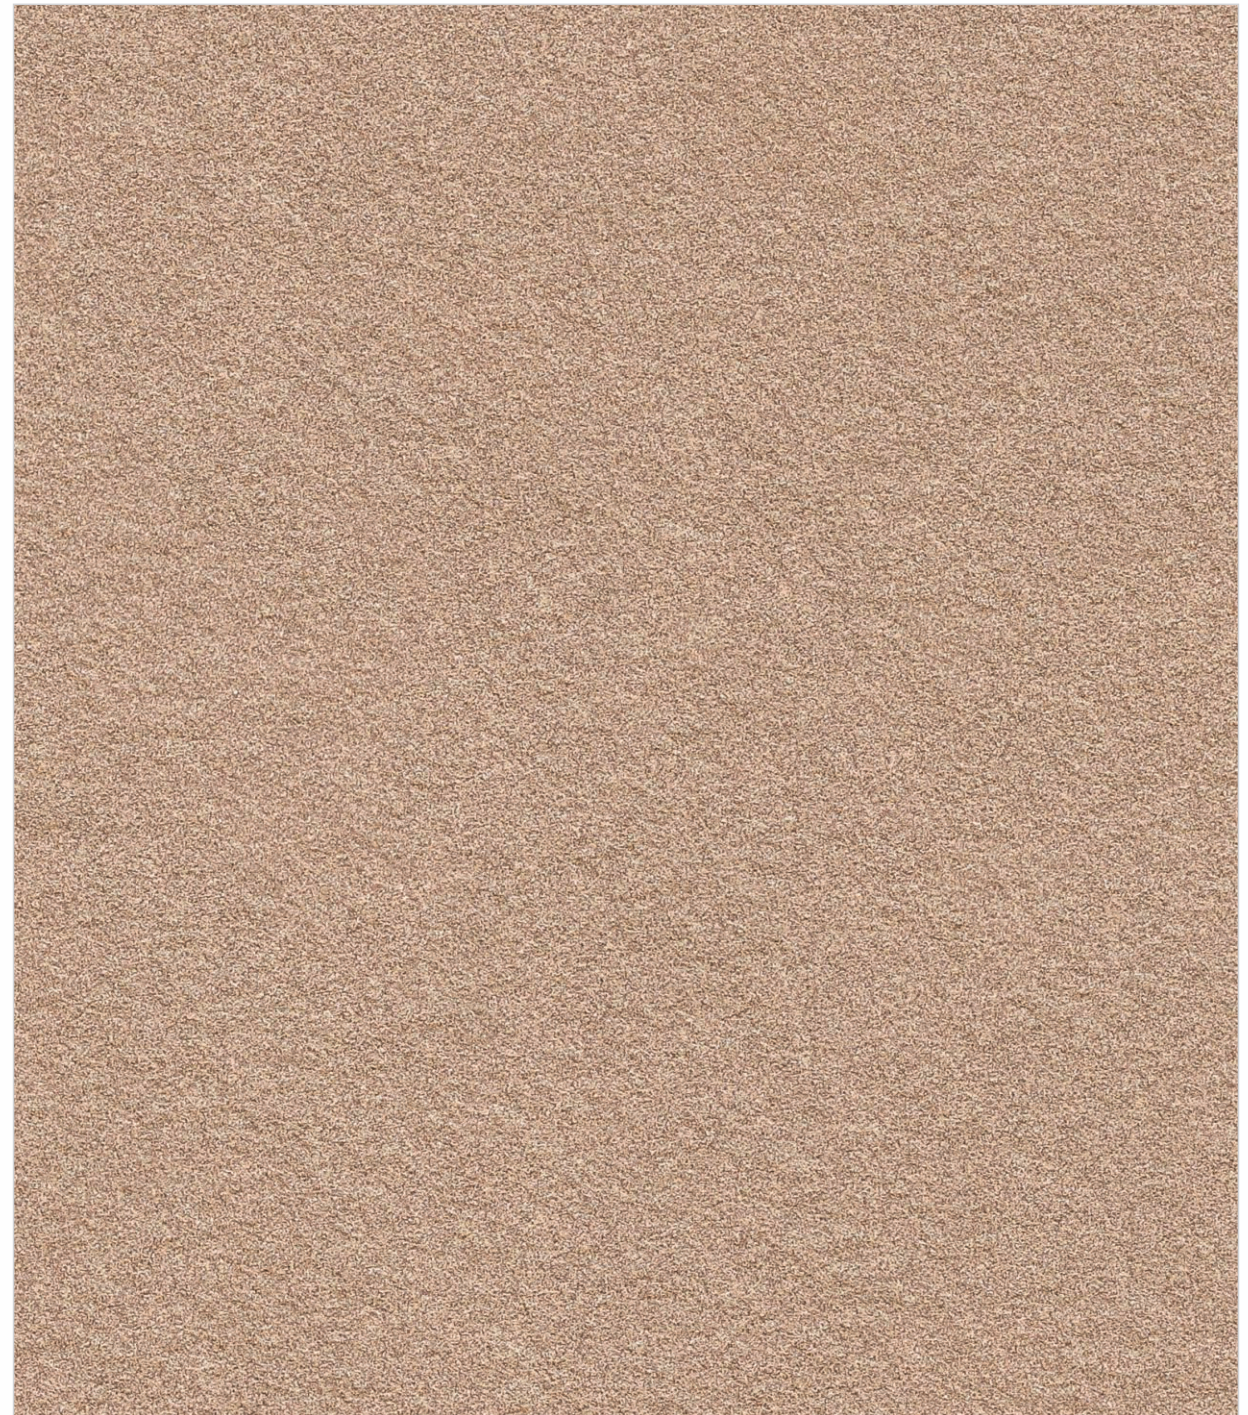


Category :
Dark

Punch :
Blast

Surface :
Anti-skid

Thickness :
15mm





CASADECK
Heavy Duty Tiles

**DECK
BLAST CAMEL**

CLICK HERE 
For
360°
VISUAL



Category :
Dark

Punch :
Blast

Surface :
Anti-skid


Thickness :
15mm

**600x
600mm**

CASADECK COLOURS



Deck Grigio




Deck Rock Grigio



Deck Kota




Deck Rock Kota




Deck Cemento




Deck Blast Cemento



Deck Granite



Deck Blast Granite



Deck Blast Coal



Deck Beige



Deck Blast Beige



Deck Tabocco



Deck Blast Tabocco



Deck Blast Camel

HOUSE OF **FULL BODY** VITRIFIED TILES

Color Range	Design Name	Type	Category
	Deck Grigio	Plain Colour	Light
	Deck Rock Grigio	Plain Colour	Light
	Deck Kota	Plain Colour	Light
	Deck Rock Kota	Plain Colour	Light
	Deck Cemento	Salt & Pepper	Light
	Deck Blast Cemento	Salt & Pepper	Light
	Deck Granite	Salt & Pepper	Light
	Deck Blast Granite	Salt & Pepper	Light
	Deck Blast Coal	Salt & Pepper	Dark
	Deck Beige	Salt & Pepper	Light
	Deck Blast Beige	Salt & Pepper	Light
	Deck Tabocco	Salt & Pepper	Dark
	Deck Blast Tabocco	Salt & Pepper	Dark
	Deck Blast Camel	Salt & Pepper	Dark



Installation System

Certification

Technical Specification

Tile Cleaning


Installation System

Casa All Collection

LAYING ON SCREED



SUGGESTED PROCESS

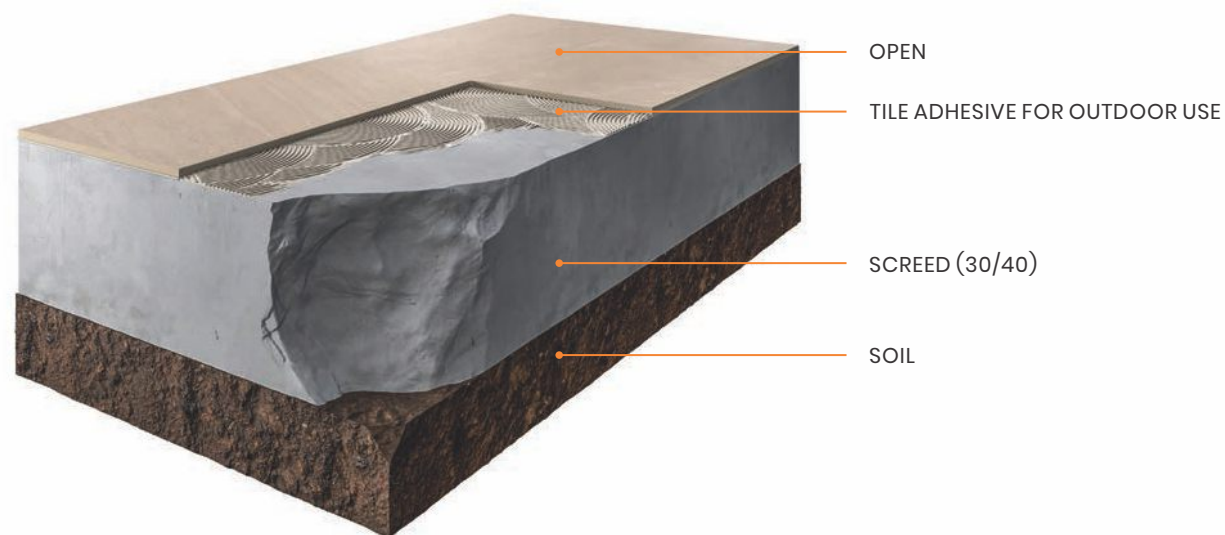

INSTALLATION SYSTEMS



Clean the existing surface and check that the screed has been properly prepared: flat, dry and cured. Spread the adhesive evenly over the surface.

मौजूदा सतह को साफ करें और जांच लें कि स्क्रीड सही से तैयार किया गया है: सपाट, सूखा और ठीक हो। सतह पे एडहेसिव को समान रूप से फैलाएं।



Put the tiles in place and tap down gently with a rubber hammer to drive out the air and ensure perfect bonding. Fit the 4/5 mm spacers into the joints.

स्लैब को जगह में रखें और धीरे से एक रबर के हथौड़े से नीचे टैप करें और हवा को बाहर निकाल सही बॉन्डिंग सुनिश्चित करें। जोड़ों में 4 या 5 मिमी स्पेसर फिट करें।




Once the glue has dried, remove the spacers, grout the joints and clean thoroughly to remove any residues.

गोंद सूख जाने के बाद, स्पेसर को हटा दें, जोड़ों को ग्राउट करें और उसके कोई अवशेष हटाने के लिए अच्छी तरह से सतह साफ करें।



LAYING AS RAISED PAVING

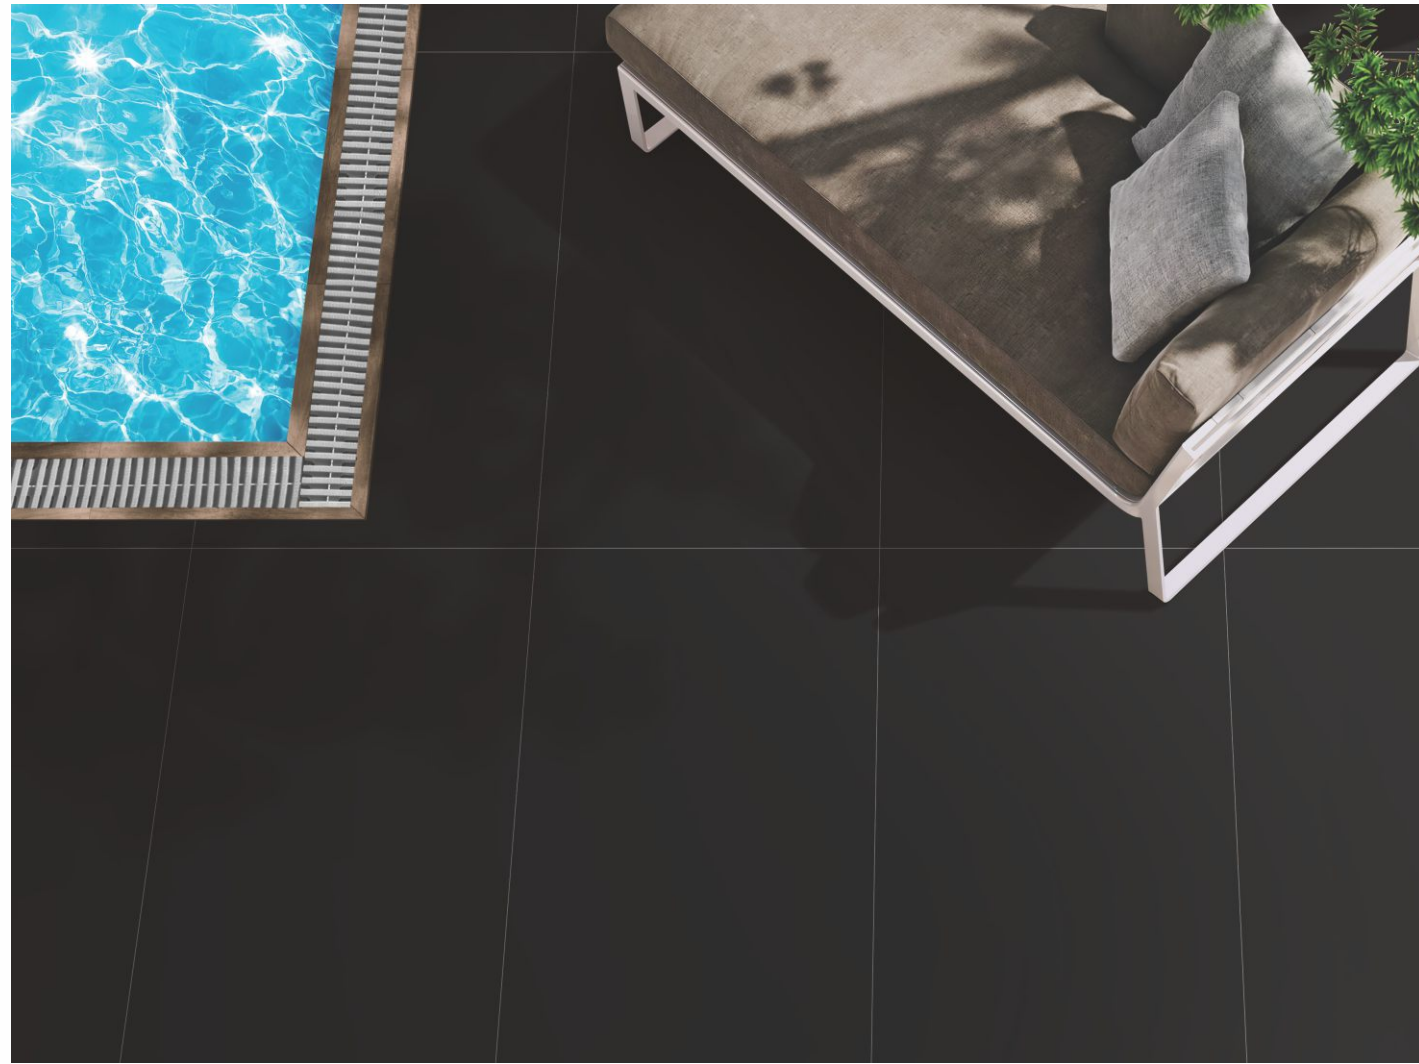

SUGGESTED PROCESS




INSTALLATION SYSTEMS



Clean the existing surface and check that the screed is level to select the right type of pedestal. The screed must be dry and cured. Prepare the chosen pedestals, cutting the ones around the edge to size and removing any unwanted wings.




मौजूदा सतह को साफ करें और जांच लें कि स्क्रीड सही प्रकार के पेडस्टल को चुनने के लिए स्तर पर है। स्क्रीड को सूखा और ठीक किया जाना चाहिए। चुने हुए पेडस्टल को तैयार करें। उन्हें आकार देने के लिए किनारे के चारों ओर काटकर तैयार करें और किसी अवांछित विंग्स को भी हटा दें।

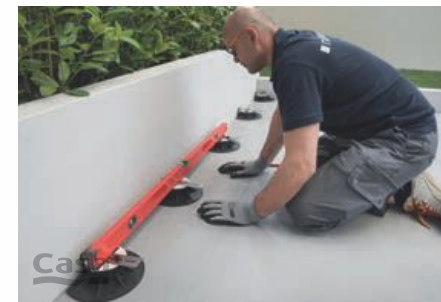

Arrange the grid of pedestals in accordance with the laying diagram, starting with those around the edge. Fit the protective tile edge clips on the pedestals against any walls.



पेडस्टल के ग्रिड को आरेख के अनुसार व्यवस्थित बिछाए, किनारे के आसपास से शुरू करें। दीवार की तरफ के पेडस्टल पर प्रोटेक्टिव टाइल एज क्लिप्स फिट करें।

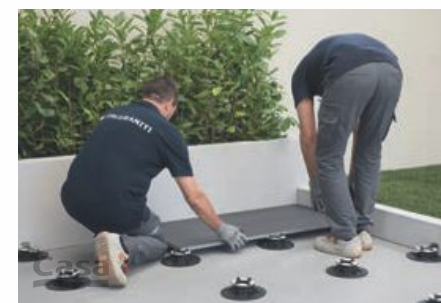

Lay the tiles on the pedestals dry. Add a pedestal in the middle of the tiles, removing the spacer wings. Systematically check the flatness and adjust the heights of the pedestals with the adjuster key to compensate for any unevenness in the substrate. A little slope of the substrate is always recommended in order to prevent water stagnation underneath the surface.




पेडस्टल पर स्लैब को सूखा बिछाए। स्लैब के बीच में एक पेडस्टल जोड़ें, स्पेसर विंग को हटाए। सबस्ट्रेट में किसी भी असमानता की भरपाई के लिए एडजस्टर की को इस्तमाल कर के व्यवस्थित रूप से पेडस्टल की ऊंचाई और समतलता की जांच करें। पानी का ठहराव रोकने के लिए सतह के नीचे सबस्ट्रेट का थोड़ा ढलान हमेशा अनुशंसित है।

LAYING ON GRASS



SUGGESTED PROCESS

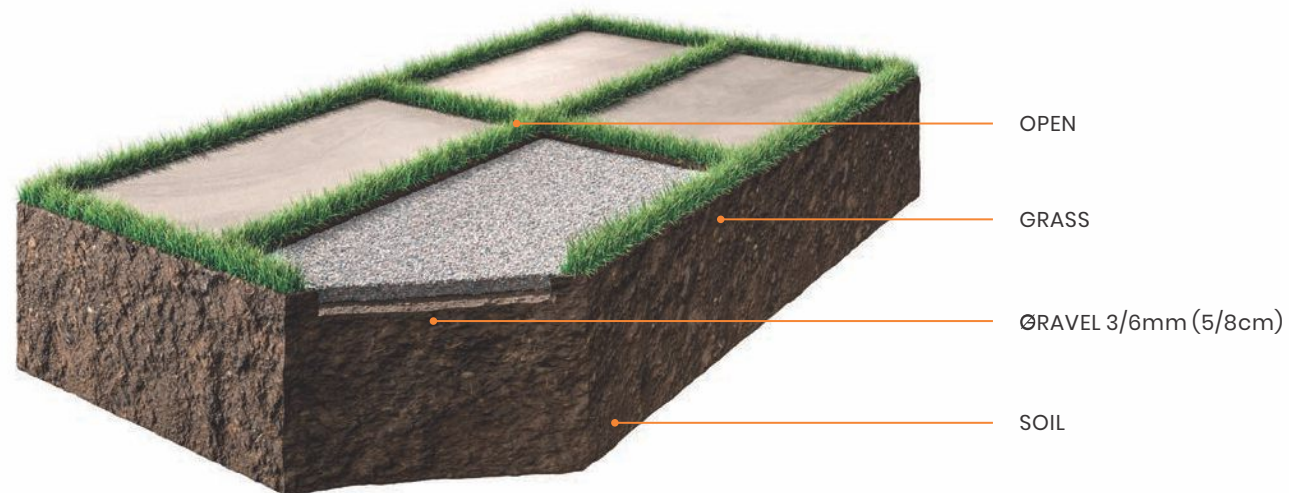

INSTALLATION SYSTEMS




Place the slabs dry on the grass and check that the gap between them is the same over the entire laying surface.

स्लैब को घास पर सुखा बिछाए और जांचें कि उनके बीच का अंतर पूरी बिछाने की सतह पर समान है।



Mark out the area of turf to be removed and dig out to a depth of at least 5 cm. Create a layer of at least 3 cm of gravel (diam. 3/6 mm).

हटाए जाने वाले टर्फ के क्षेत्र को चिह्नित करें और कम से कम 5 सेमी की गहराई तक खो दें। कम से कम 3 सेमी बजरी की एक परत बनाएं (व्यास 3/6 मिमी)।

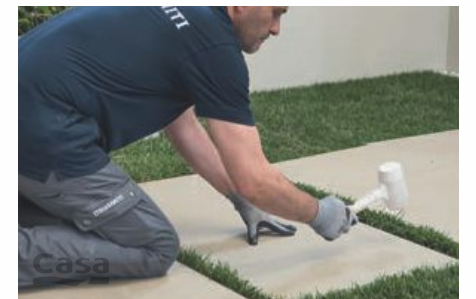


After checking that the substrate created is level, put the slabs in place and tap down gently with a rubber hammer to settle them into place and eliminate any unevenness.

बनाया गया सबस्ट्रेट स्तर होने की जाँच करने के बाद स्लैब रखें और एक रबर हथौड़े के साथ उन्हें जगह में व्यवस्थित करने के लिए धीरे से नीचे टैप करें और किसी भी तरह की असमानता को दूर करें।

LAYING ON GRAVEL



SUGGESTED PROCESS

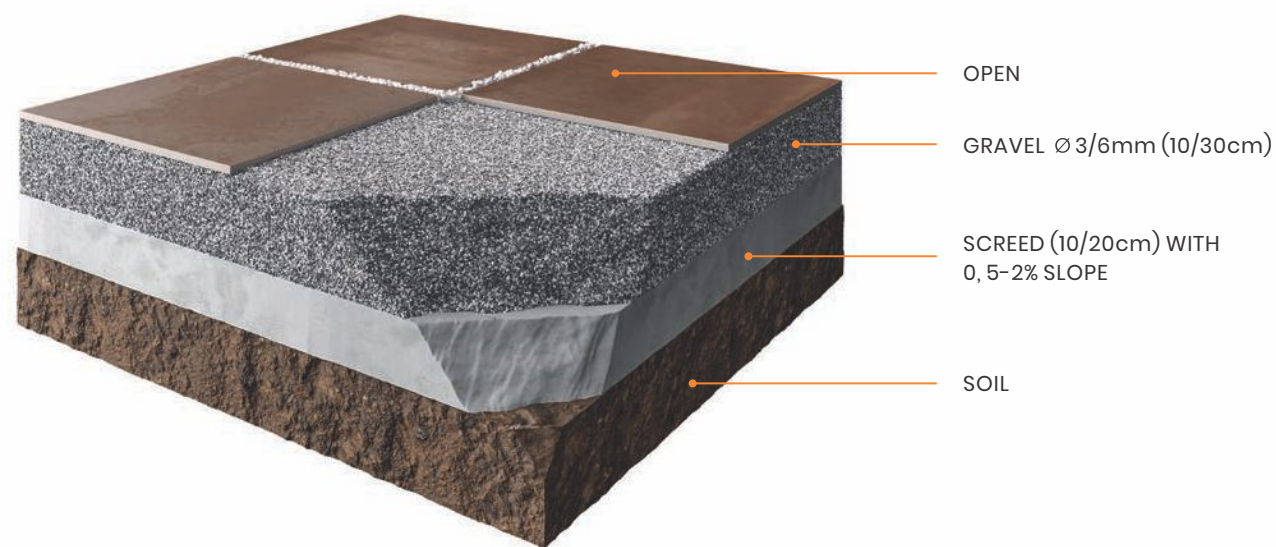

INSTALLATION SYSTEMS



Create a layer of at least 5 cm of gravel (diam. 3/6 mm) on the existing substrate. Level the surface with a straightedge and check the flatness.

कम से कम 5 सेमी बजरी की परत (डायम 3/6 मिमी) मौजूदा सबस्ट्रेट पर बनाये। सतह को स्ट्रेट एज के साथ लेवल करे और उसकी समतलता की जाँच करें।



Place the slabs dry on the gravel and check that the gap between them is the same over the entire laying surface. Tap down gently with a rubber hammer to settle them into place and eliminate any unevenness.


स्लैब को बजरी पर सुखा बिछाए और जांचें कि उनके बीच का अंतर पूरी बिछाने की सतह पर समान है। उन्हें जगह में बिछाने के लिए रबर के हथौड़े से धीरे से नीचे की ओर टैप करें और किसी भी असमानता को दूर करें।




Check the flatness of the surface created. Add gravel in the joints to level the paving. Decorative gravel larger in diameter than the type use for the substrate can also be used in the joints.

बनाई गई सतह की समतलता की जाँच करें। फ़र्श को समतल करने के लिए जोड़ों में बजरी डालें। सबस्ट्रेट के लिए उपयोग किए जाने वाले प्रकार की तुलना में व्यास में बड़े सजावटी बजरी का उपयोग जोड़ों में भी किया जा सकता है।

LAYING ON SAND

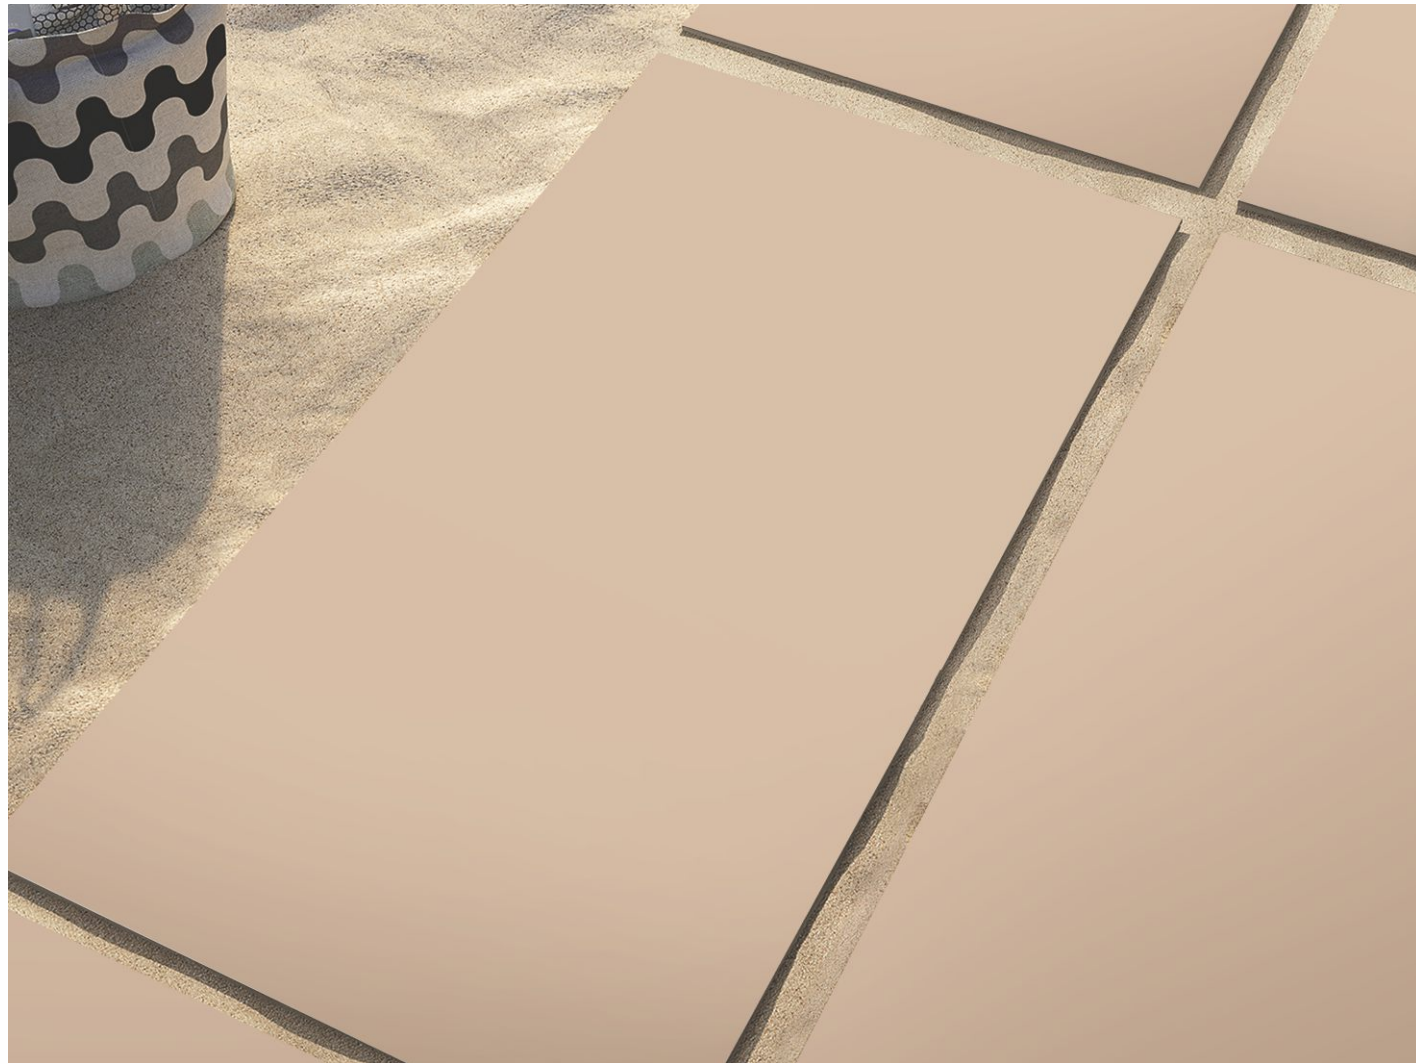

SUGGESTED PROCESS

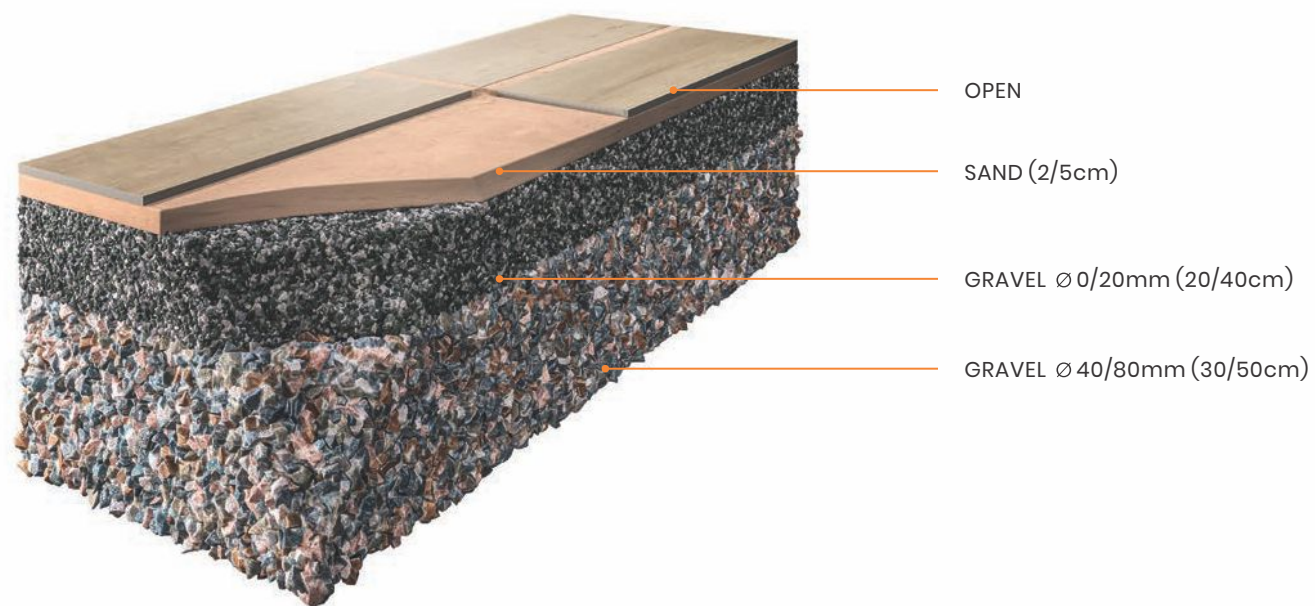

INSTALLATION SYSTEMS



Prepare a layer of sand at least 5 cm thick on the existing substrate (screed or gravel). Level the surface with a straightedge and check the flatness.




कम से कम 5 सेमी मोटी रेत की परत मौजूदा सब्सट्रेट (स्क्रीड या बजरी) पर तैयार करें। सतह को स्ट्रेट एज के साथ लेवल करें और उसकी समतलता की जाँच करें।



Place the slabs dry on the sand and check that the gap between them is the same over the entire laying surface. Tap down gently with a rubber hammer to settle them into place.



स्लैब को रेत पर सुखा बिछाए और जांचें कि उनके बीच का अंतर पूरी बिछाने की सतह पर समान है। उन्हें जगह में बिछाने के लिए रबर के हथौड़े से धीरे से नीचे की ओर टैप करें और किसी भी असमानता को दूर करें।

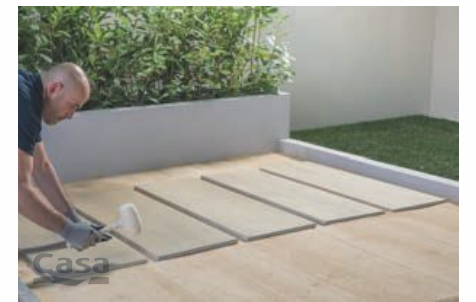

Add sand in the joints to level the paving. Clean the surface of the slabs.



फर्श को समतल करने के लिए जोड़ों में रेत डालें। स्लैब की सतह को साफ करें।



OUR NAME STANDS FOR TECHNICAL AND AESTHETIC EXCELLENCE.



Around the world, we proudly promote materials that best express that Made in India aesthetic, style and technical excellence.

On the international market, our name is synonymous with Full body tiles technical porcelain stoneware that offers extremely high technical and aesthetic performance. We transform top quality raw materials into ceramic projects able to interpret the many requirements of a continuously evolving world.



Tiles of India is the certified brand of origin which exclusively marks all products fully manufactured in India representing the decades old values system of the Indian Ceramic Industry. We support all those values promoted by the Indian Ceramics code of ethics, from **100% Indian production to social and environmental responsibility.**



100% ISO 9001:2015 certification is internationally recognised and represents a guarantee of the excellence and quality of the management system. CASA TILES decided of its own accord to undertake this important process, adopting a set of rules, responsibilities and checks to improve the efficiency of processes and customer satisfaction, to boost its competitiveness and maintain compliance with the highest quality standards.



SAFETY SYSTEM MANAGEMENT

The health and wellbeing of employees are crucial priorities for CASA TILES. the attainment of ISO 45001 certification strengthens a business culture that sees safety not simply as a question of regulatory compliance, but as an essential part of working processes. Regulation is a necessary tool for generating a new model of sustainable competitiveness that can improve company performance across the board.

ECO-SUSTAINABLE DEVELOPMENT



ENVIRONMENTAL MANAGEMENT

CASA TILES conforms with the environmental regulations envisaged by the ISO 14001 certification. This certification measures and controls the reduced environmental impact of production sites, through an environmental management system based on strict parameters.

Casa Tiles CONTRIBUTES TOWARDS ENERGY EFFICIENCY THROUGH:

- 100% recycling of waters used
- 100% recycling of unfired and fired waste
- 100% recycling of packaging and pallets
- 60% recycling of waste.

LOW ATMOSPHERIC GAS EMISSIONS

- 100% Water Consumption Savings
- 100% Recycling of Unfired Waste
- 100% Recycling of Fired Waste
- 100% Recycled Packaging
- 70% Recycling of Industrial Waste
- Noise Pollution Monitoring
- 100% Recycled Pallets



LOW ATMOSPHERIC GAS EMISSIONS



100% WATER CONSUMPTION SAVINGS



100% RECYCLING OF UNFIRED WASTE



100% RECYCLING FIRED WASTE



100% RECYCLED PACKAGING



90% RECYCLING OF INDUSTRIAL WASTE



NOISE POLLUTION MONITORING



100% RECYCLED PALLETS



IMC is a voluntary certification system, for the design, construction and management of high performance sustainable buildings; it promotes an integrated design system that concerns the whole building. It is developed by the U.S. INTERNATIONAL MANAGEMENT COUNCIL (USIMC), an association which provides a global approach to sustainability, providing recognition for virtuous performance levels in key areas of human and environmental health. The system is based on rating credits for each of the requisites featuring the sustainability of the building. The sum of the credits composes the certification level achieved.

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF CASA FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≤ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance (Friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

PACKING DETAILS

Collection	Size	Pieces / Box	Whight / box (Approx)	Coverage Area / Box
Casa Deck	600x600mm	2 Pieces	23.00kg	7.7 ft ² or 0.72 mtr ²

Disclaimer

Casa reserves the right to delete & amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colours of tiles shown in this catalogue are purely illustrative to printing process. Please refer actual sample before final selection. The details of sizes, colours and references should be verified for typographical errors.

CLEANING & MAINTENANCE

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface. For most cases only a damp cloth is sufficient for cleaning. Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine. For highly aggressive cleaning caused by some common food and substances follow the table below.

For more details,
check our tutorial videos
on the website and
on Youtube.




CASADECK COLLECTION

LAYING ON SCREED




LAYING ON GRASS

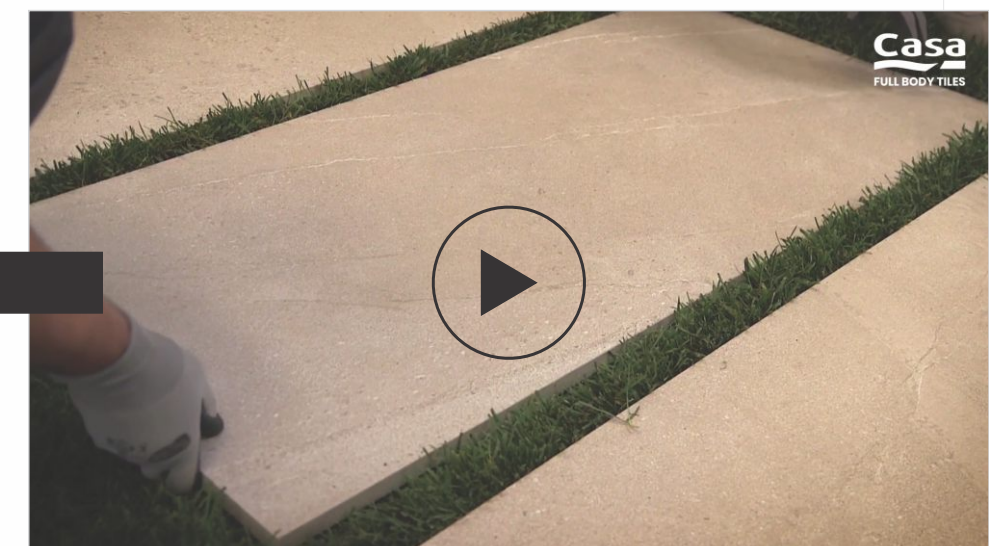

LAYING ON GRAVEL



LAYING ON SAND

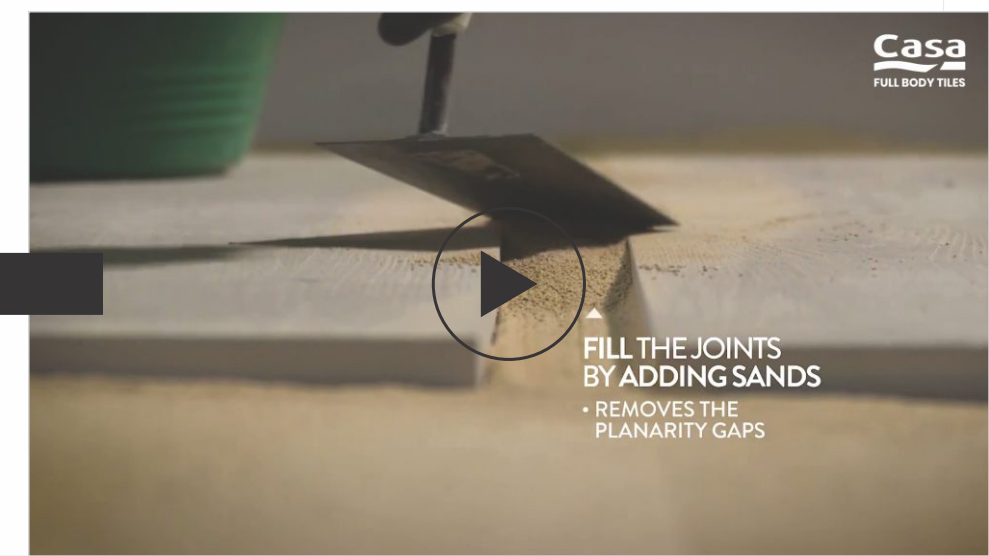

A PREMIUM COLLECTION

Casastone
BOLD SURFACES


**CASA
DESERT**
FULL BODY TILES

CASAYARD
EXQUISITE PUNCH, INSPIRED BY NATURE

CASADECK
Heavy Duty Tiles

**CASA
POLO**
FULLBODY TILES

CASA STEP
READY TO INSTALL FULLBODY STEPS

CasaArt
— FULLBODY TILE MOSAIC —

Casa Cloud
DIGITAL FULLBODY TILES

[CLICK COLLECTION TO OPEN PRODUCT PDF](#)



Casagres Tiles India

Sartanpar Road,
Opposite 166 Kva Substation,
Morbi - 363 621, Gujarat, India

casa@fullbodytiles.com
fullbodytiles.com

Copyright 2023 By Casagres Tiles India
(designed By: Sipl) June 2023