

Casastone

BOLD SURFACES



Casa
FULL BODY TILES

Overview

- 4 Limitless Sensation
- 6 Redefining Color
- 8 Empowering Colors
- 10 Infinite Combination
- 12 Product Features
- 14 Craftsmanship
- 16 Hybrid+ Technology
- 18 Meta Surface
- 20 Product Range
- 22 Style Index & Category

Technical Info

- 53 Installation System
- 58 Certification
- 59 Technical Specification
- 59 Tile Cleaning
- 60 Installation Video
- 60 Casa Collection

Limitless Sensation

When hands meet earth and soil, they reactivate the deep bond that binds us to nature. Unique sensations are born, exploring the potential of creativity through refined craftsmanship.

Combined with the fine and elegant structure of Stone, these sensations create a new material, to allow the sensibility of designers to express with free and natural breath.

A material that finds in the many colors of the earth, a design that is capable to reconcile variety and organicity, knowing no limits of expression.





Redefining Colours

Casastone was born from the inspiration to create a symbiosis between nature and stone, a primitive element and a refined stone.

Natural materials that enrich each other, brought together by the craftsmanship of the designer searching for a new kind of surface.

Skilled hands caress grains of earth and perceive their intimate essence. Strengthened by this tactile knowledge, they shape delicate textures, recalling the ethereal lightness of stone.

The result is a warm and vivid material, defined in twelve colors referring to the nature and colors inspired by sand, clay and spices.

Casastone is designed to meet the latest architecture and interior design needs.

*Minimal
But complex
Classical but
contemporary*
CASASTONE
*Is the way
For every style
and Design need*

Argillia	Soil	Cremoso	Umber
Kota	Gesso	Mustard	Metallo
Sabbia	Coal	Grano	Grigio

INDEX

RANGE

BASIC

PLUS

SUPER PLUS


TECH. DATA

Infinite Combination

The theory of colors tells us about the rules of analogy and complementarity, about how color emerges from nature when tint, tone and shade come into play. It also tells how our perception of a colored surface varies depending on the other colors that are associated with it.

This is what we have considered in the design of Casastone. The result is an organic set of colors, that can stand by themselves or that can be harmonically blended in infinite combinations.

A wide range of options for interior and exterior applications, in residential, commercial, work or public spaces.

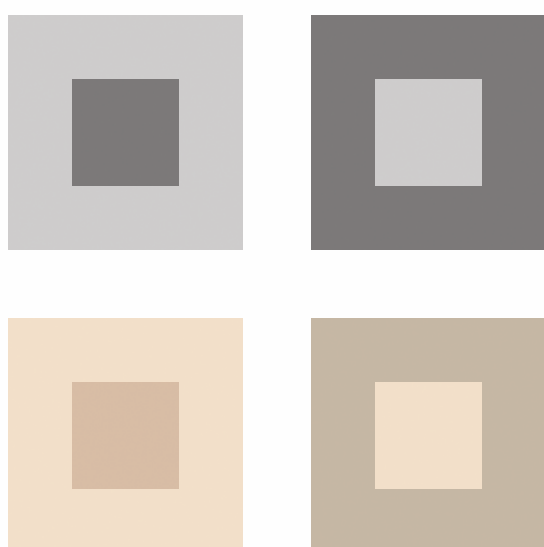

Argillia	Soil	Metallo	Argillia	Soil
Cre moso	Grigio	Gesso	Mustard	Coal
Gesso	Kota	Cre moso	Sabbia	Grigio
Metallo	Sabbia	Grano	Argillia	Umber
Grano	Coal	Kota	Cre moso	Grano
Mustard	Grigio	Gesso	Sabbia	Coal
Umber	Metallo	Mustard	Grigio	Soil
Kota	Cre moso	Grano	Kota	Sabbia

Casastone
BOLD SURFACES



Solid



Safe,
Clean,
fireproof



Highly
sustainable

FULLBODY

Solid, strong and uniform, it maintains its appearance even in the event of extreme wear and damage.

Sanitisable, resistant to acid, easy to clean, does not burn and does not release harmful substances.

Fullbody porcelain stoneware produced with maximum respect for the environment and for workers. Long-lasting and recyclable

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

FULLBODY

**Minerals.
Nature. Craftmanship.**

Natural minerals
and raw materials,
combined in a naturally
random pattern

WHAT YOU SEE

ON TOP.

IS WHAT YOU HAVE

ON THE INSIDE.





HYBRID+
TECHNOLOGY

**FULL BODY
SKID RESISTANT
GERM FREE**



Protect
ANTIBATTERICO - ANTIMICROBIAL


No Germs & Fungus, Less Health Issues | Get Rid of the Odours
Various Applications | Improves Quality of Life

Casa Fullbody Tiles Collections comes with protect antibacterial hybrid+ technology. These Vitrified matt tiles is an innovative product made from finest ingredients with anti microbial treatment that inhibits growth of germs like bacteria and fungus.

This full body product with skid resistant property can be safely used in hospitals, schools, residential areas, offices or any other commercial spaces, where longevity and hygiene is paramount.

FULL BODY

These tiles are ideal for zones with heavy footfall because even after extended use, their colour remains the same.



SKID RESISTANT

A versatile surface with skid resistant property makes these tiles perfect for zero slippage on slopes of upto 25°.



GERM FREE (99.9%)

A specially formulated anti-microbial application used during the manufacturing process enables these tiles to prevent habitation of germs like bacteria and fungus, making them an ideal choice for today's health-conscious consumers.



SCRATCH RESISTANT
STAIN RESISTANT



Confidently Smooth, Comfortably Stylish.

As smooth as the breezing wind, 'Meta Surface' is yet another achievement for us. The exceptional surface is achieved with the exclusive and patented Italian technology, which is the first of its kind in India. It takes the surface quality to where no other technology can reach.

With this innovation, we have overcome the myth that smooth surfaces get scratches and stains. Despite having the unmatched smoothness, 'Meta Surface' is resistant to scratches.

600x1200mm

Argillia	Soil	Gesso
Mustard	Kota	Grigio
Metallo	Cremoso	Grano
Sabbia	Coal	Umber

600x600mm

Kota	Grigio
Gesso	Coal
Metallo	Cremoso

600x1200mm

Gesso	Mustard
Kota	Metallo
Cremoso	Coal

600x600mm

Kota	Cremoso
Gesso	



Style Index and Category

Casastone, an extraordinary homogeneous surface that is a unique delight for interiors and architects. The collection gives creative freedom to experiment, play around with their thoughts and ideas in an innovative way.

Our Natural solid range of colours, offers architects and interiors a rich palette for creating inspired structures that adds luxury and elegance to your space.

Casa full body tiles are characterized by soft solid colours and natural granite base with a surface of premium matt and smooth polished, is available in 60x60cm & 60x120cm size.

Basic

- Metallo
- Grigio
- Grano
- Cremoso
- Sabbia
- Kota


Plus

- Argilla
- Soil

Super Plus

- Coal
- Gesso
- Mustard
- Umber



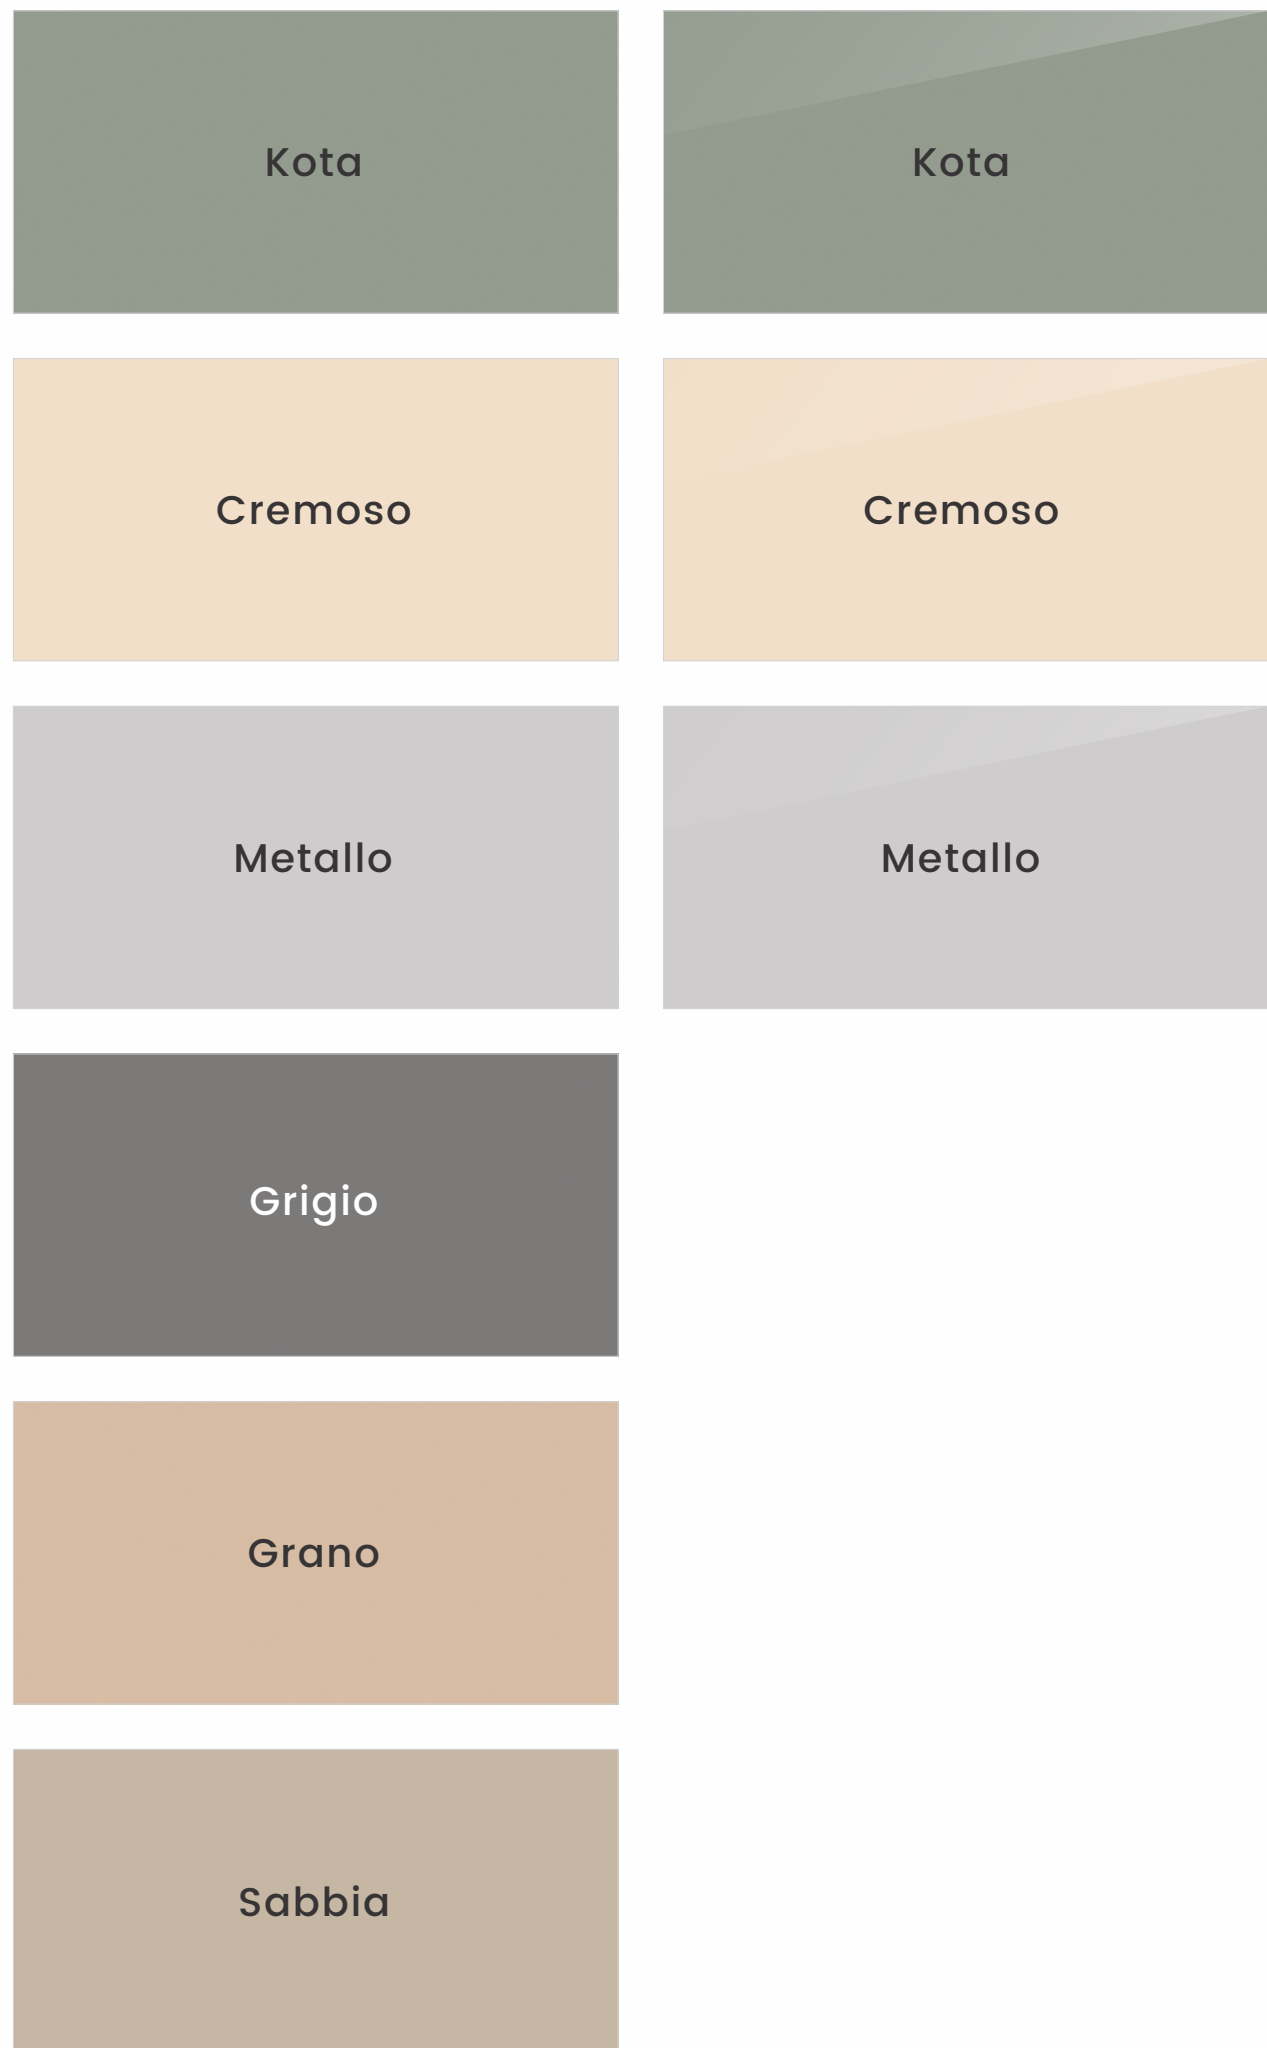

CASASTONE BASIC COLOR RANGE

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA



KOTA

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

SIZE : 600x1200mm | SURFACE : SMOOTH POLISHED | CATEGORY : BASIC



SIZE : 600x600mm | SURFACE : SMOOTH POLISHED | CATEGORY : BASIC

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

KOTA

SIZE : 600x600mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

CLICK HERE 

For
360°
VISUAL



Category : Basic

600x1200mm



Surface : Premium Matt



Surface : Smooth Polished

600x600mm



Surface : Premium Matt



Surface : Smooth Polished



INDEX

RANGE

BASIC

PLUS

SUPER PLUS


TECH. DATA

CREMOSO

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES

SIZE : 600x1200mm | SURFACE : SMOOTH POLISHED | CATEGORY : BASIC

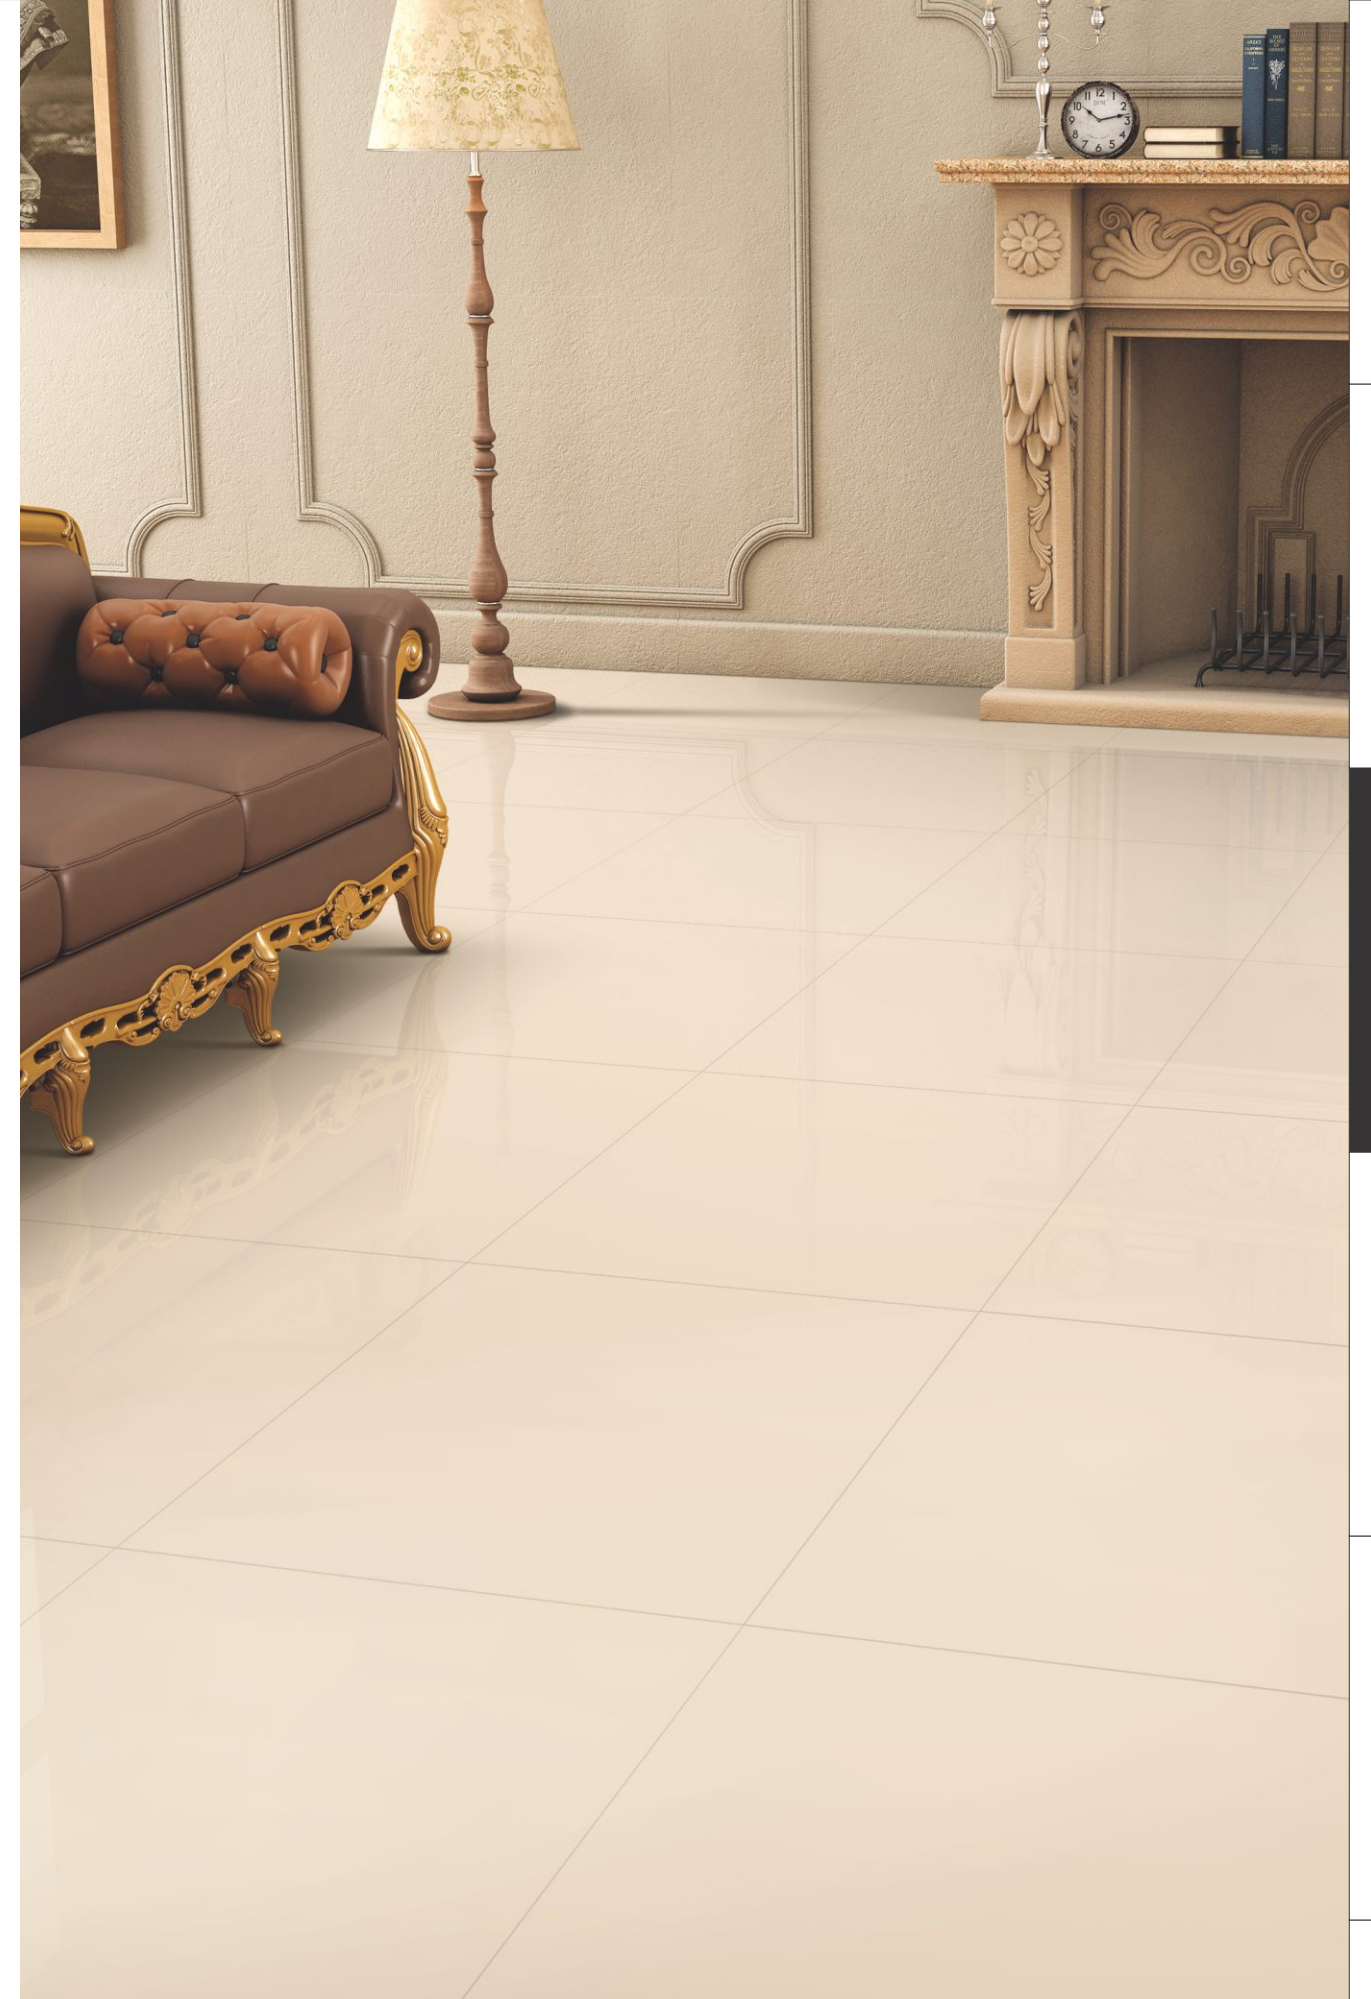

SIZE : 600x600mm | SURFACE : SMOOTH POLISHED | CATEGORY : BASIC

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

CREMOSO

SIZE : 600x600mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES



INDEX

RANGE

BASIC


PLUS

SUPER PLUS

TECH. DATA


CLICK HERE 

For
360°
VISUAL

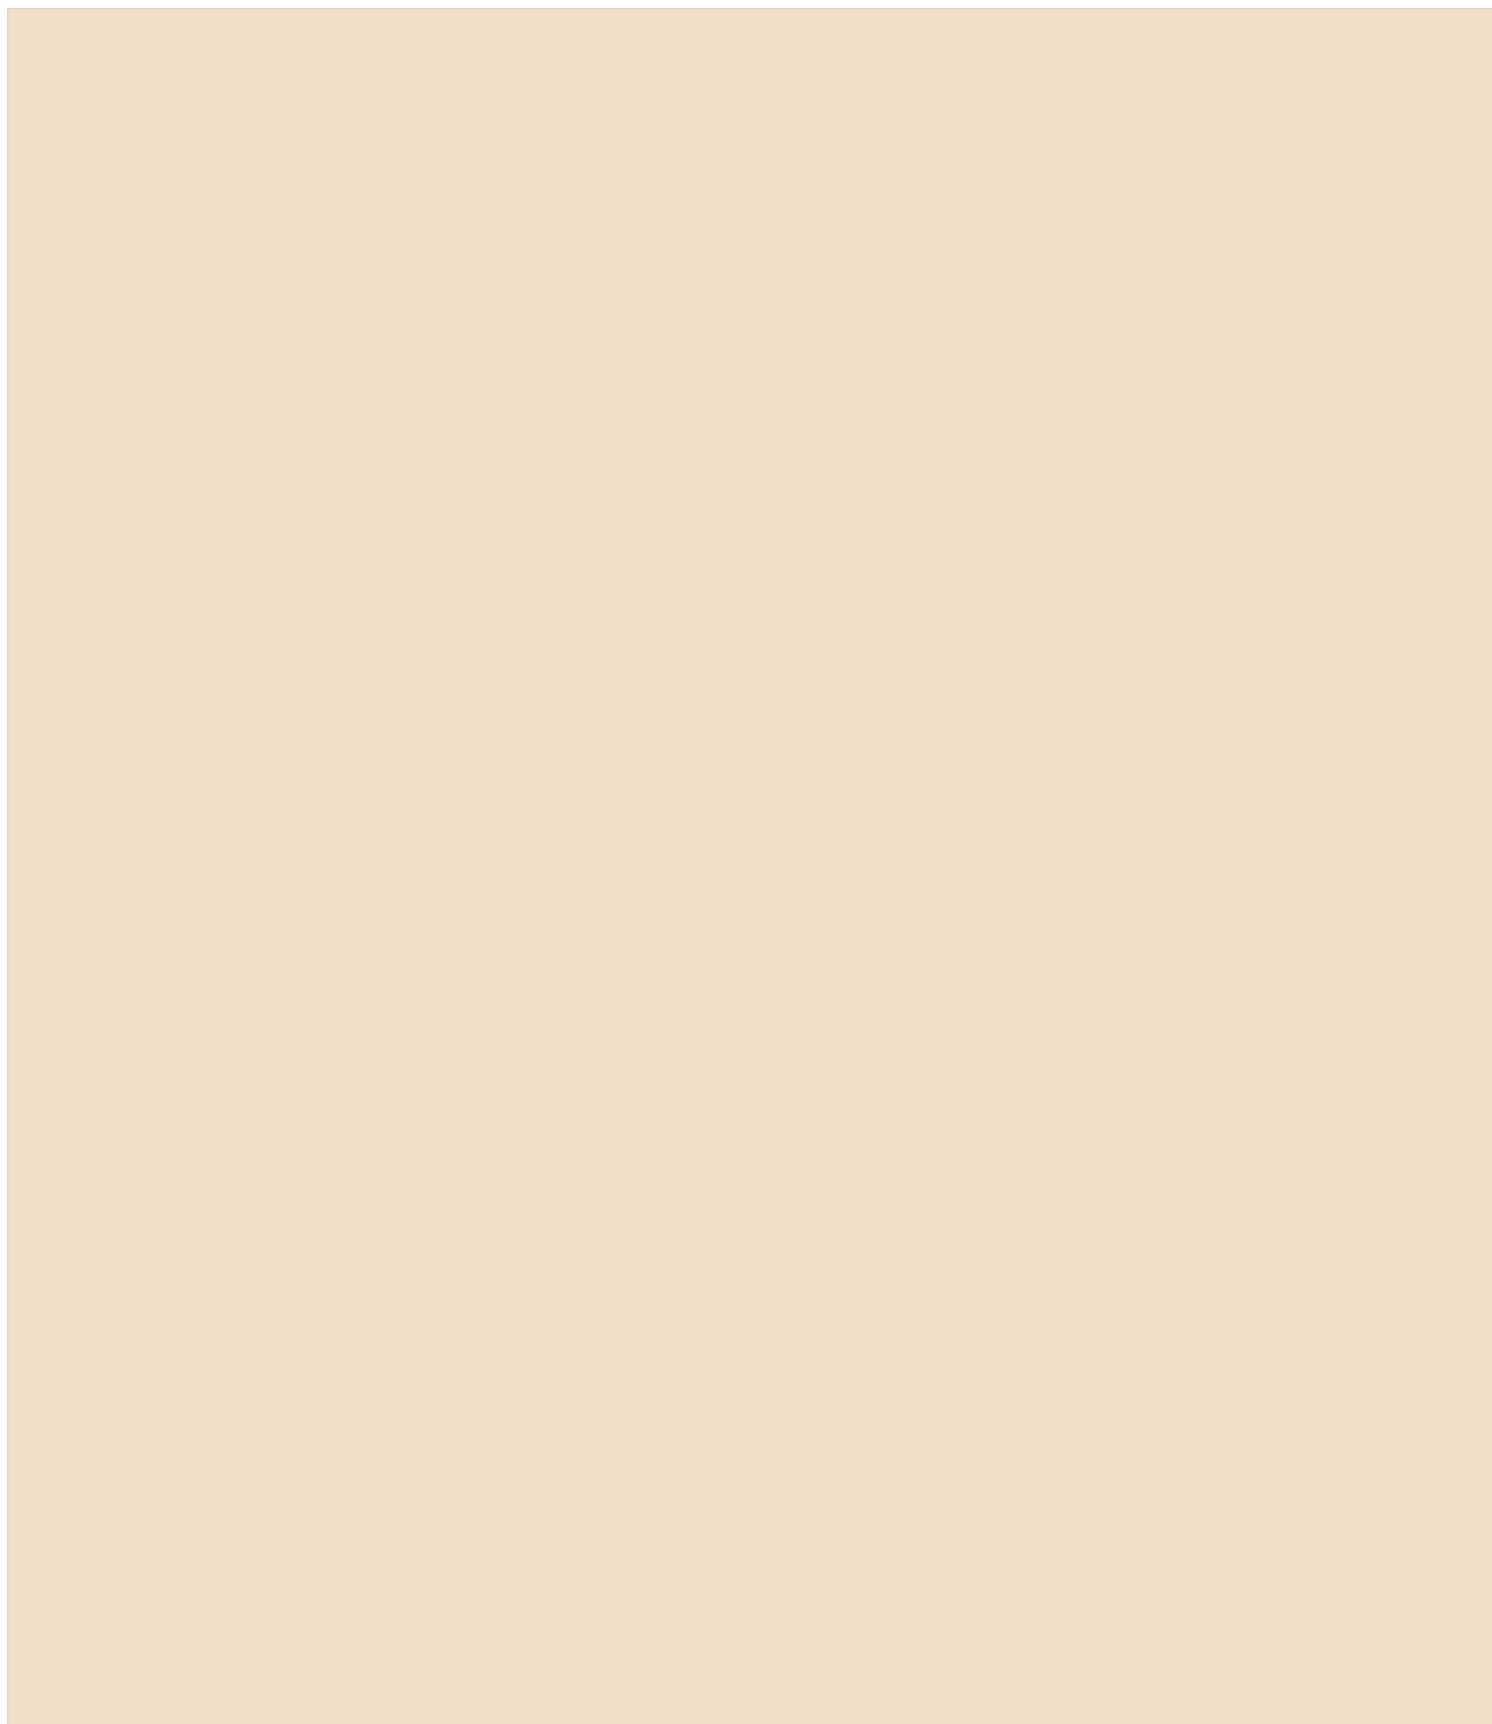

Category : Basic

600x1200mm

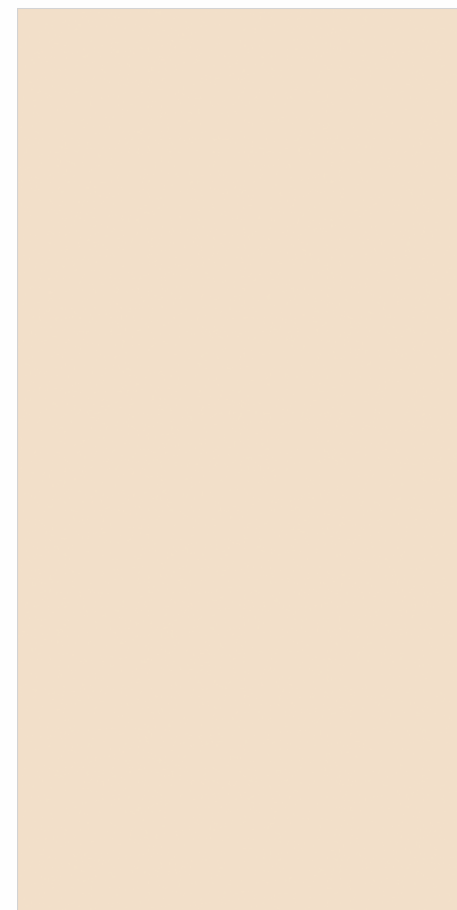


Surface : Premium Matt



Surface : Smooth Polished

600x600mm

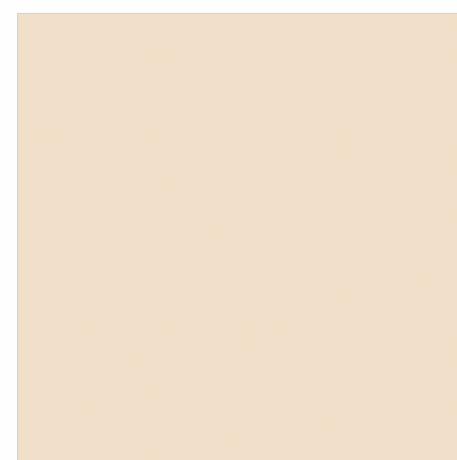

Surface : Premium Matt



Surface : Smooth Polished



METALLO

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES

INDEX

RANGE


BASIC

PLUS

SUPER PLUS

TECH. DATA

SIZE : 600x1200mm | SURFACE : SMOOTH POLISHED | CATEGORY : BASIC

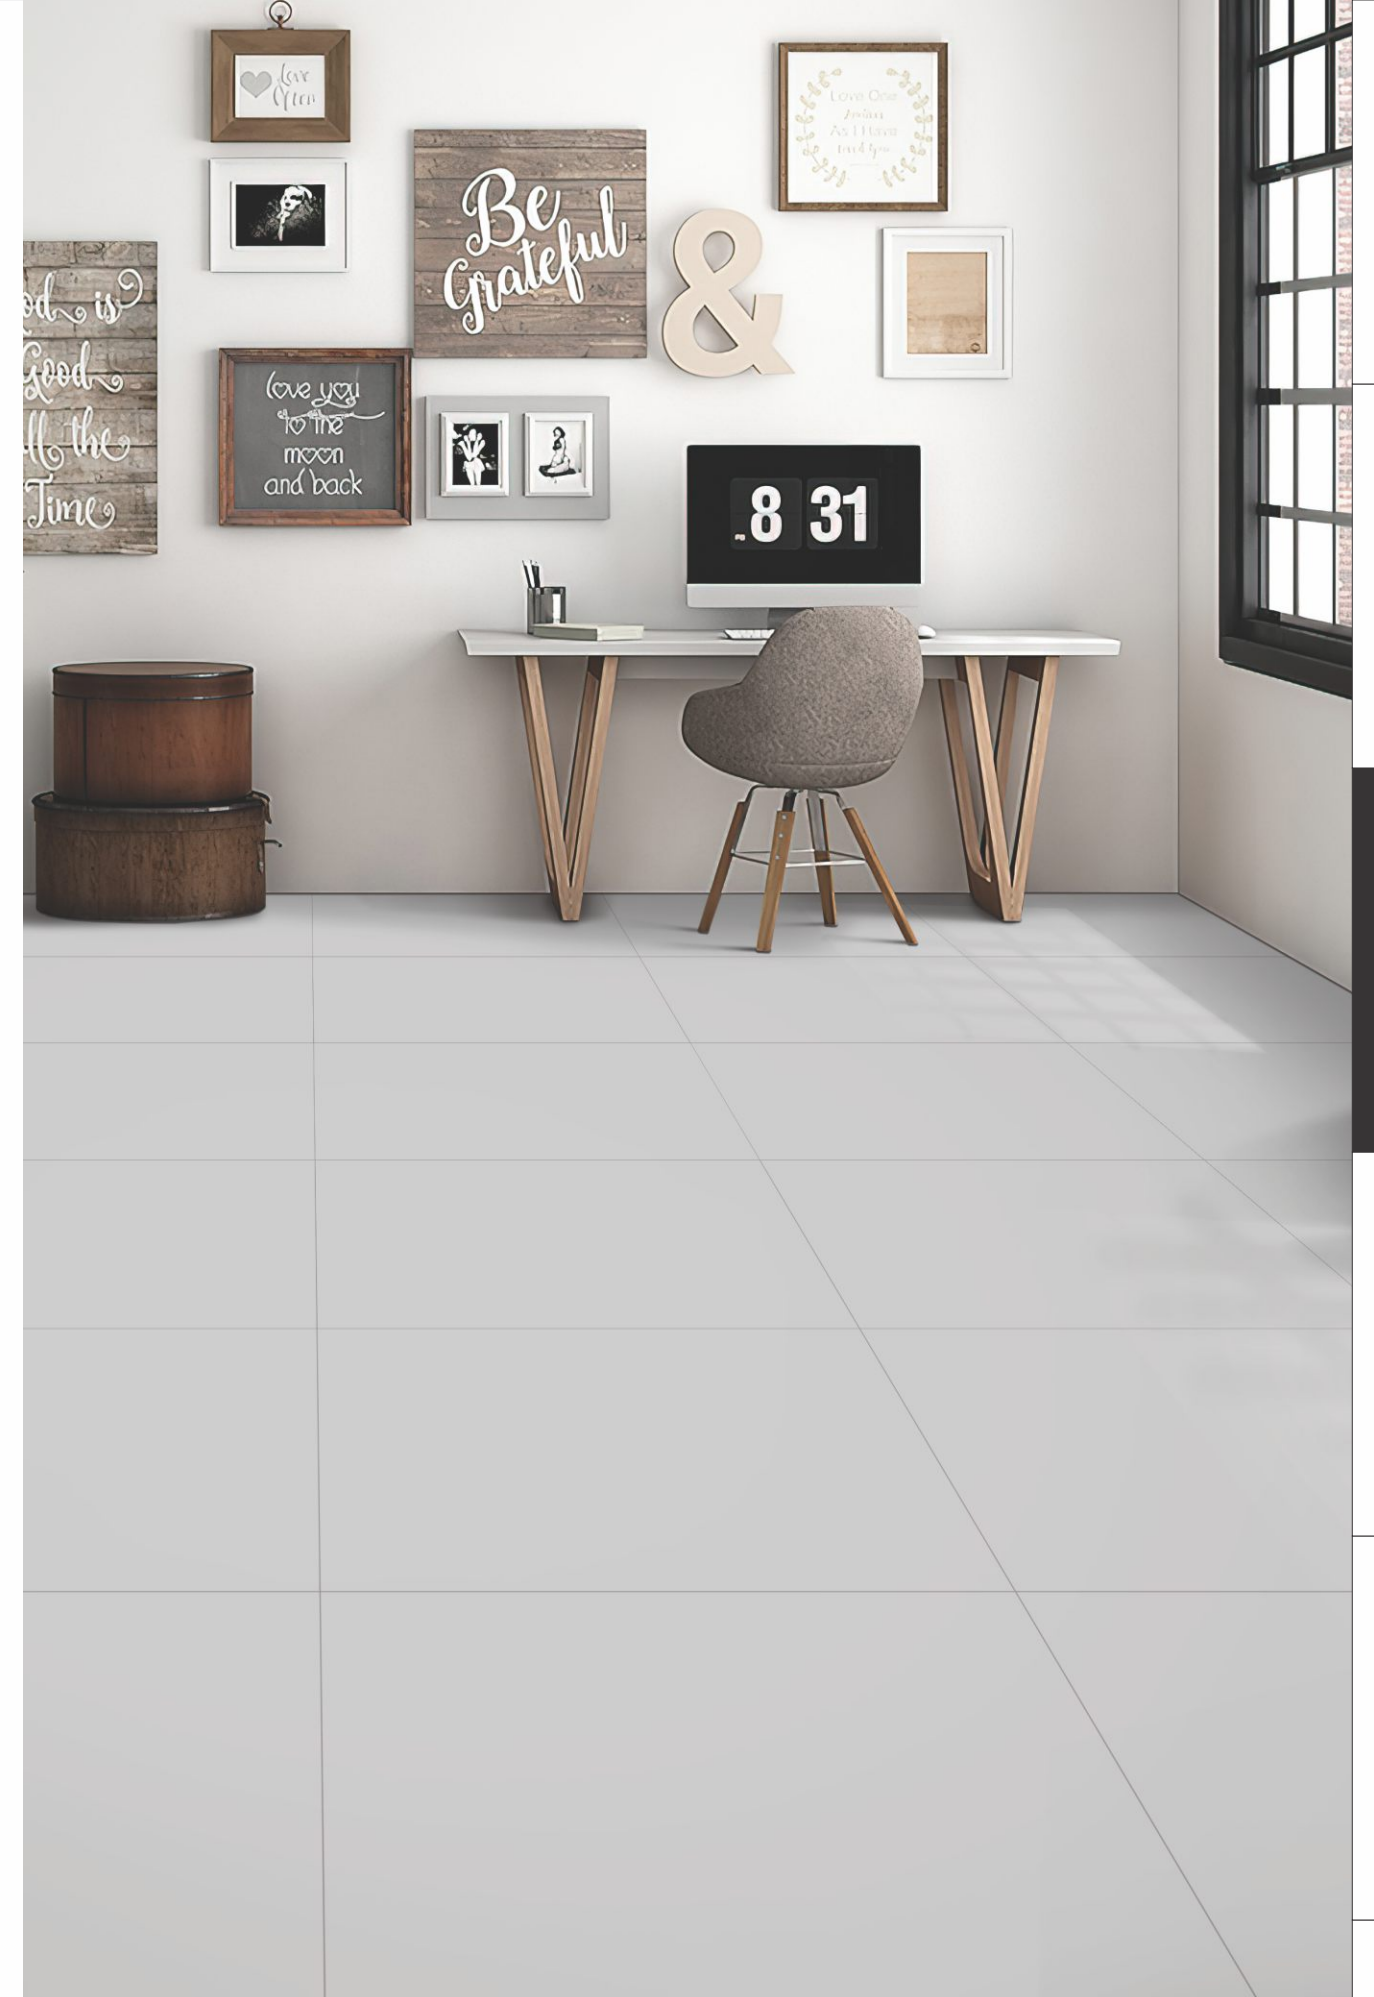

SIZE : 600x600mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

METALLO


CLICK HERE 

For
360°
VISUAL




Category : Basic

600x1200mm

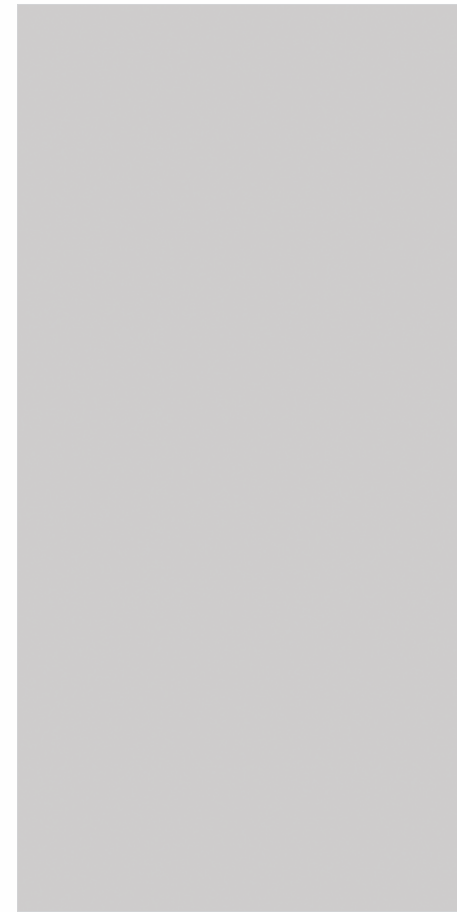


Surface : Premium Matt

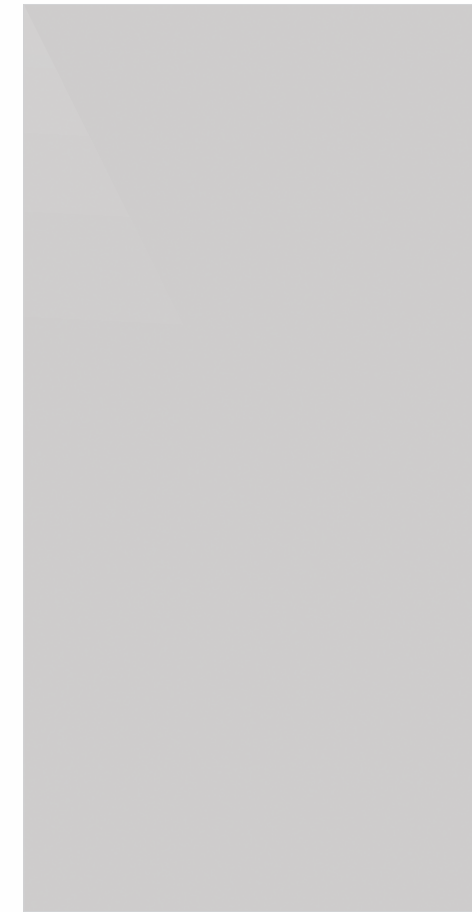

Surface : Smooth Polished

600x600mm

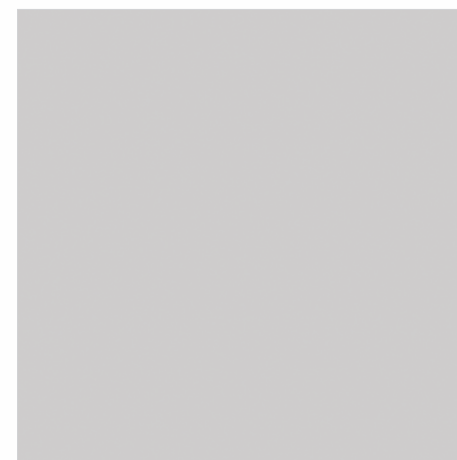

Surface : Premium Matt



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

GRIGIO

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES

GRIGIO

SIZE : 600x600mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

CLICK HERE 

For
360°
VISUAL



Category : Basic

600x1200mm



Surface : Premium Matt

600x600mm



Surface : Premium Matt



GRANO

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA


CLICK HERE 

For
360°
VISUAL



Category : Basic

600x1200mm

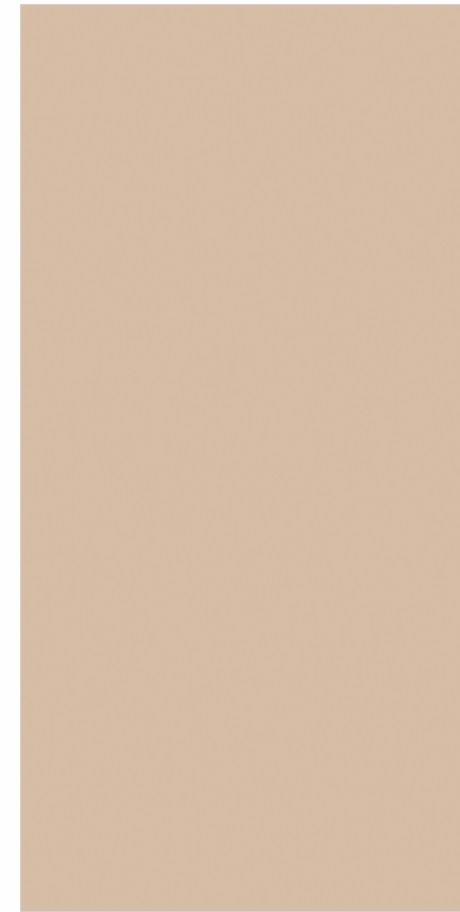

Surface : Premium Matt



SABBIA

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : BASIC

Casastone
BOLD SURFACES

CLICK HERE 

For
360°
VISUAL



Category : Basic

600x1200mm



Surface : Premium Matt

Argillia

Soil

CASASTONE
PLUS COLOR RANGE



ARGILLIA

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : Plus

Casastone
BOLD SURFACES

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

CLICK HERE



For
360°

VISUAL



Category : Plus

600x1200mm



Surface : Premium Matt



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA


SOIL

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : PLUS

Casastone
BOLD SURFACES

CLICK HERE 

For
360°
VISUAL








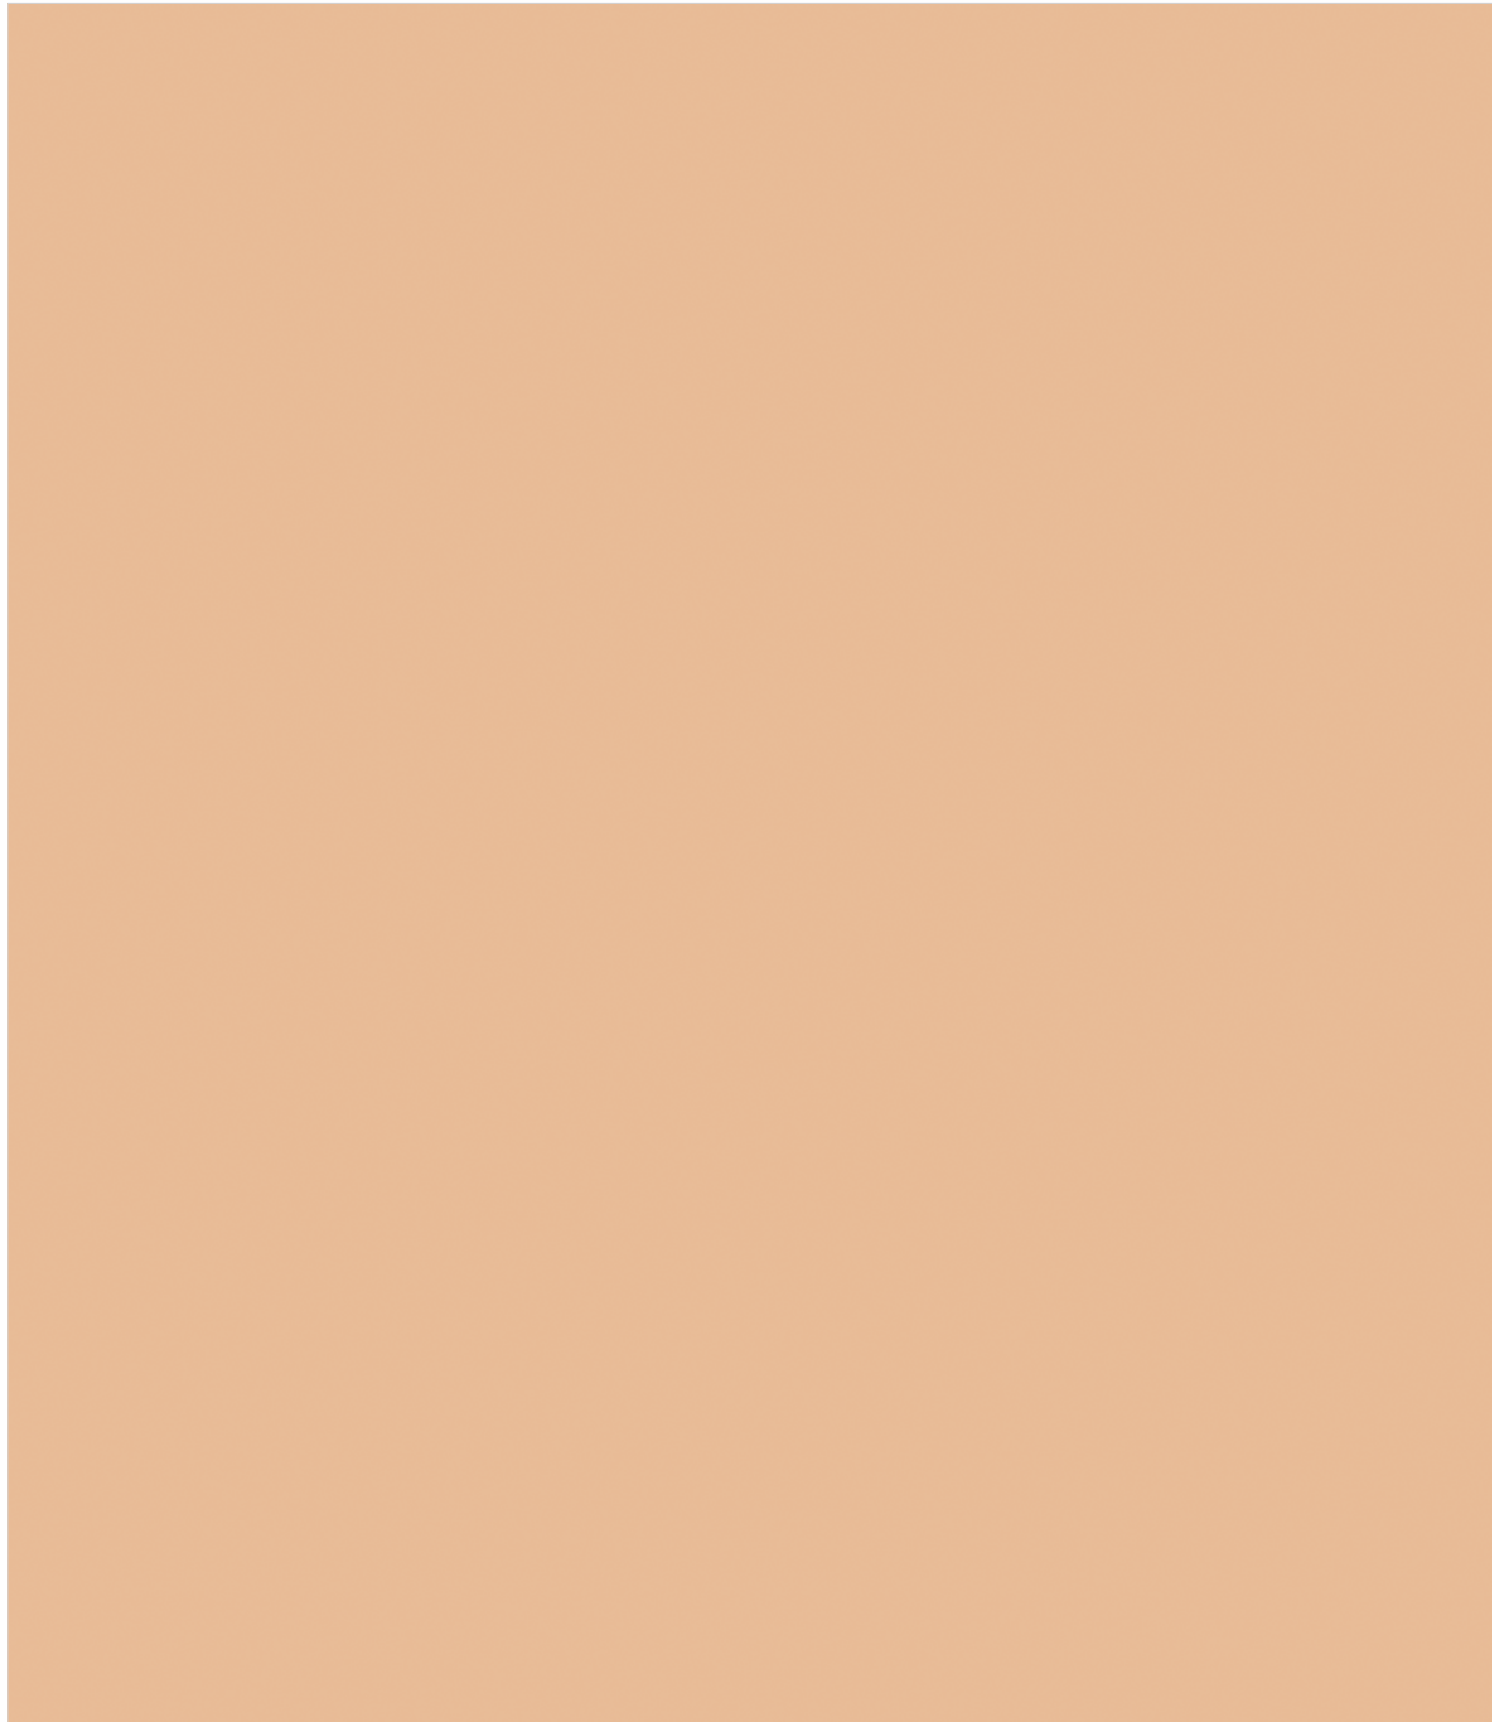


Category : Plus

600x1200mm



Surface : Premium Matt

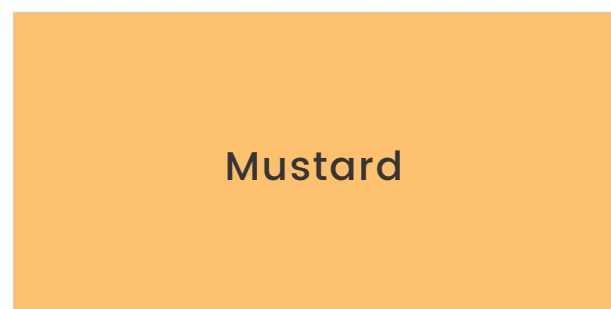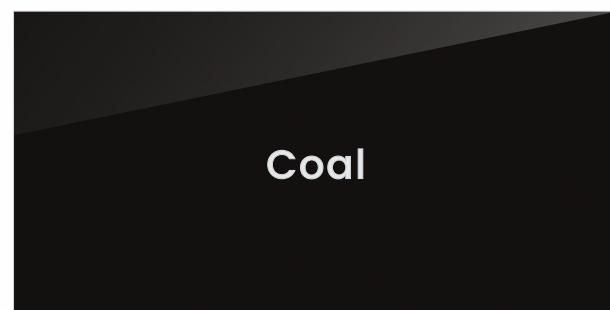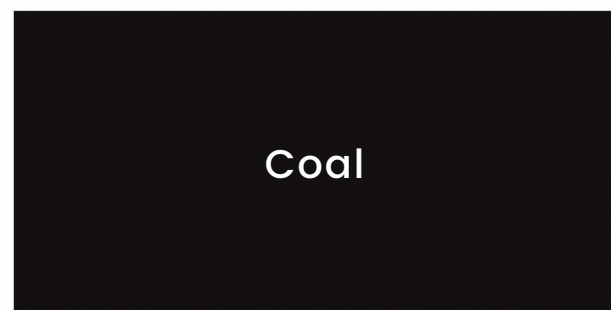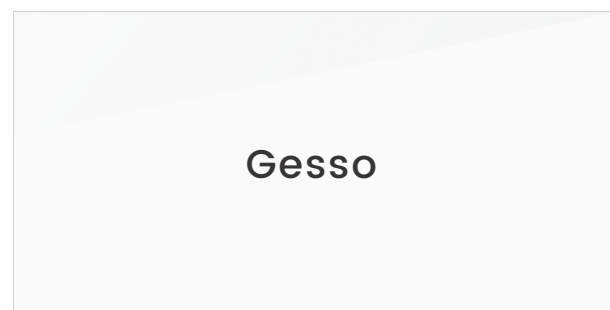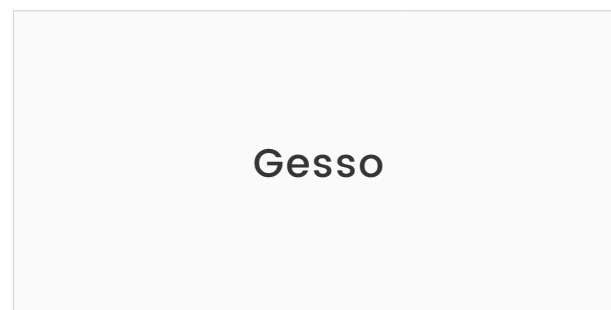

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

CASASTONE SUPER PLUS COLOR RANGE



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

GESSO

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES

SIZE : 600x1200mm | SURFACE : SMOOTH POLISHED | CATEGORY : SUPER PLUS



SIZE : 600x600mm | SURFACE : SMOOTH POLISHED | CATEGORY : SUPER PLUS

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

GESO

SIZE : 600x600mm | SURFACE : PREMIUM MATT | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA


CLICK HERE 

For
360°
VISUAL




Category : Super Plus

600x1200mm

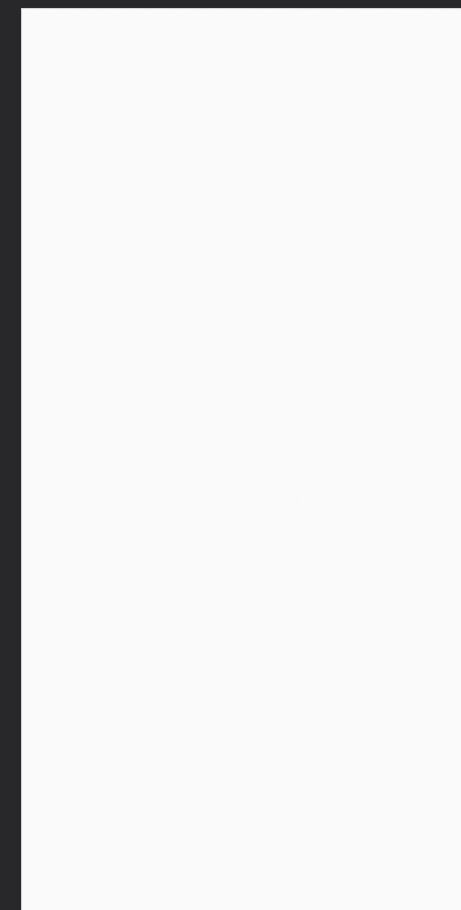


Surface : Premium Matt

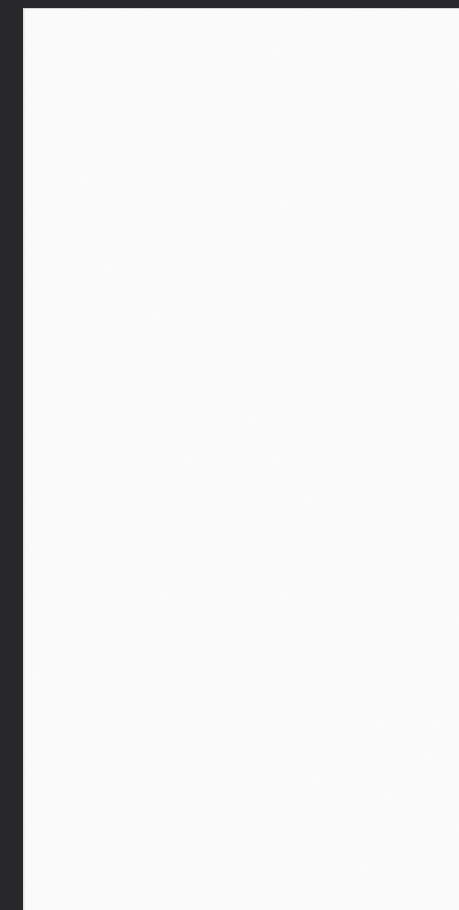


Surface : Smooth Polished

600x600mm

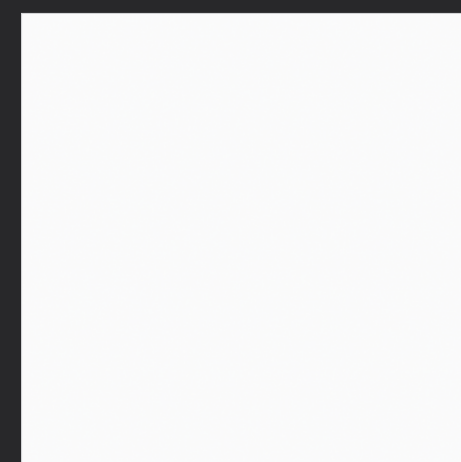

Surface : Premium Matt

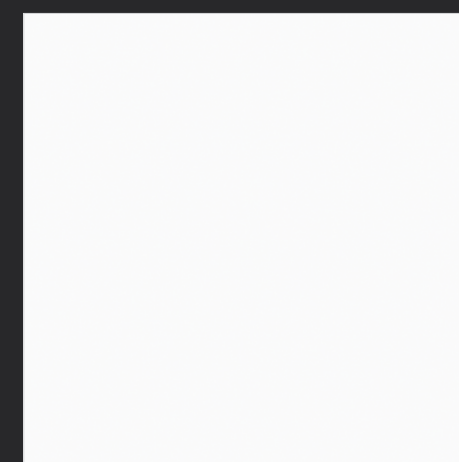

Surface : Smooth Polished



COAL

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

COAL

SIZE : 600x1200mm | SURFACE : SMOOTH POLISHED | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

COAL

SIZE : 600x600mm | SURFACE : PREMIUM MATT | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES

CLICK HERE 

For
360°
VISUAL



Category : Super Plus

600x1200mm



Surface : Premium Matt



Surface : Smooth Polished

600x600mm



Surface : Premium Matt



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

MUSTARD

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES

SIZE : 600x1200mm | SURFACE : SMOOTH POLISHED | CATEGORY : BASIC



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

MUSTARD

CLICK HERE 

For
360°
VISUAL



Category : Super Plus

600x1200mm



Surface : Premium Matt



Surface : Smooth Polished



INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA


UMBER

SIZE : 600x1200mm | SURFACE : PREMIUM MATT | CATEGORY : SUPER PLUS

Casastone
BOLD SURFACES

CLICK HERE 

For
360°
VISUAL



Category : Super Plus

600x1200mm



Surface : Premium Matt

Certification

Installation Process

Technical Specification

Tile Cleaning

Installation System

Casa All Collection

OUR NAME STANDS FOR TECHNICAL AND AESTHETIC EXCELLENCE.



Around the world, we proudly promote materials that best express that Made in India aesthetic, style and technical excellence.

On the international market, our name is synonymous with Full body tiles technical porcelain stoneware that offers extremely high technical and aesthetic performance. We transform top quality raw materials into ceramic projects able to interpret the many requirements of a continuously evolving world.



Tiles of India is the certified brand of origin which exclusively marks all products fully manufactured in India representing the decades old values system of the Indian Ceramic Industry. We support all those values promoted by the Indian Ceramics code of ethics, from **100% Indian production to social and environmental responsibility.**



100% ISO 9001:2015 certification is internationally recognised and represents a guarantee of the excellence and quality of the management system. CASA TILES decided of its own accord to undertake this important process, adopting a set of rules, responsibilities and checks to improve the efficiency of processes and customer satisfaction, to boost its competitiveness and maintain compliance with the highest quality standards.



SAFETY SYSTEM MANAGEMENT

The health and wellbeing of employees are crucial priorities for CASA TILES. the attainment of ISO 45001 certification strengthens a business culture that sees safety not simply as a question of regulatory compliance, but as an essential part of working processes. Regulation is a necessary tool for generating a new model of sustainable competitiveness that can improve company performance across the board.

ECO-SUSTAINABLE DEVELOPMENT



ENVIRONMENTAL MANAGEMENT

CASA TILES conforms with the environmental regulations envisaged by the ISO 14001 certification. This certification measures and controls the reduced environmental impact of production sites, through an environmental management system based on strict parameters.

Casa Tiles CONTRIBUTES TOWARDS ENERGY EFFICIENCY THROUGH:

- 100% recycling of waters used
- 100% recycling of unfired and fired waste
- 100% recycling of packaging and pallets
- 60% recycling of waste.

LOW ATMOSPHERIC GAS EMISSIONS

- 100% Water Consumption Savings
- 100% Recycling of Unfired Waste
- 100% Recycling of Fired Waste
- 100% Recycled Packaging
- 70% Recycling of Industrial Waste
- Noise Pollution Monitoring
- 100% Recycled Pallets



LOW ATMOSPHERIC GAS EMISSIONS



100% WATER CONSUMPTION SAVINGS



100% RECYCLING OF UNFIRED WASTE



100% RECYCLING FIRED WASTE



100% RECYCLED PACKAGING



90% RECYCLING OF INDUSTRIAL WASTE



NOISE POLLUTION MONITORING



100% RECYCLED PALLETS




IMC is a voluntary certification system, for the design, construction and management of high performance sustainable buildings; it promotes an integrated design system that concerns the whole building. It is developed by the U.S. INTERNATIONAL MANAGEMENT COUNCIL (USIMC), an association which provides a global approach to sustainability, providing recognition for virtuous performance levels in key areas of human and environmental health. The system is based on rating credits for each of the requisites featuring the sustainability of the building. The sum of the credits composes the certification level achieved.

LAYING ON SCREED



SUGGESTED PROCESS

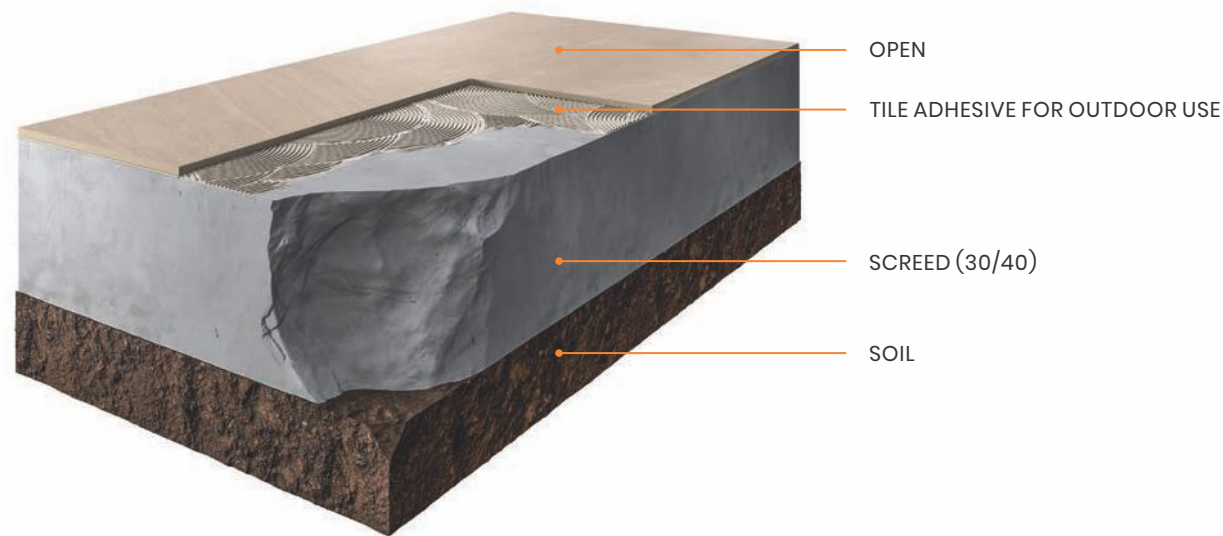

CASASTONE COLLECTION

INSTALLATION SYSTEMS



Clean the existing surface and check that the screed has been properly prepared: flat, dry and cured. Spread the adhesive evenly over the surface.



मौजूदा सतह को साफ करें और जांच लें कि स्क्रीड सही से तैयार किया गया है: सपाट, सूखा और ठीक हो। सतह पे एडहेसिव को समान रूप से फैलाएं।



Put the tiles in place and tap down gently with a rubber hammer to drive out the air and ensure perfect bonding. Fit the 4/5 mm spacers into the joints.



स्लैब को जगह में रखें और धीरे से एक रबर के हथौड़े से नीचे टैप करें और हवा को बाहर निकाल सही बॉन्डिंग सुनिश्चित करें। जोड़ों में 4 या 5 मिमी स्पेसर फिट करें।



Once the glue has dried, remove the spacers, grout the joints and clean thoroughly to remove any residues.



गोंद सूख जाने के बाद, स्पेसर को हटा दें, जोड़ों को ग्राउट करें और उसके कोई अवशेष हटाने के लिए अच्छी तरह से सतह साफ करें।



INDEX

RANGE


BASIC

PLUS

SUPER PLUS

TECH. DATA

LAYING AS RAISED PAVING

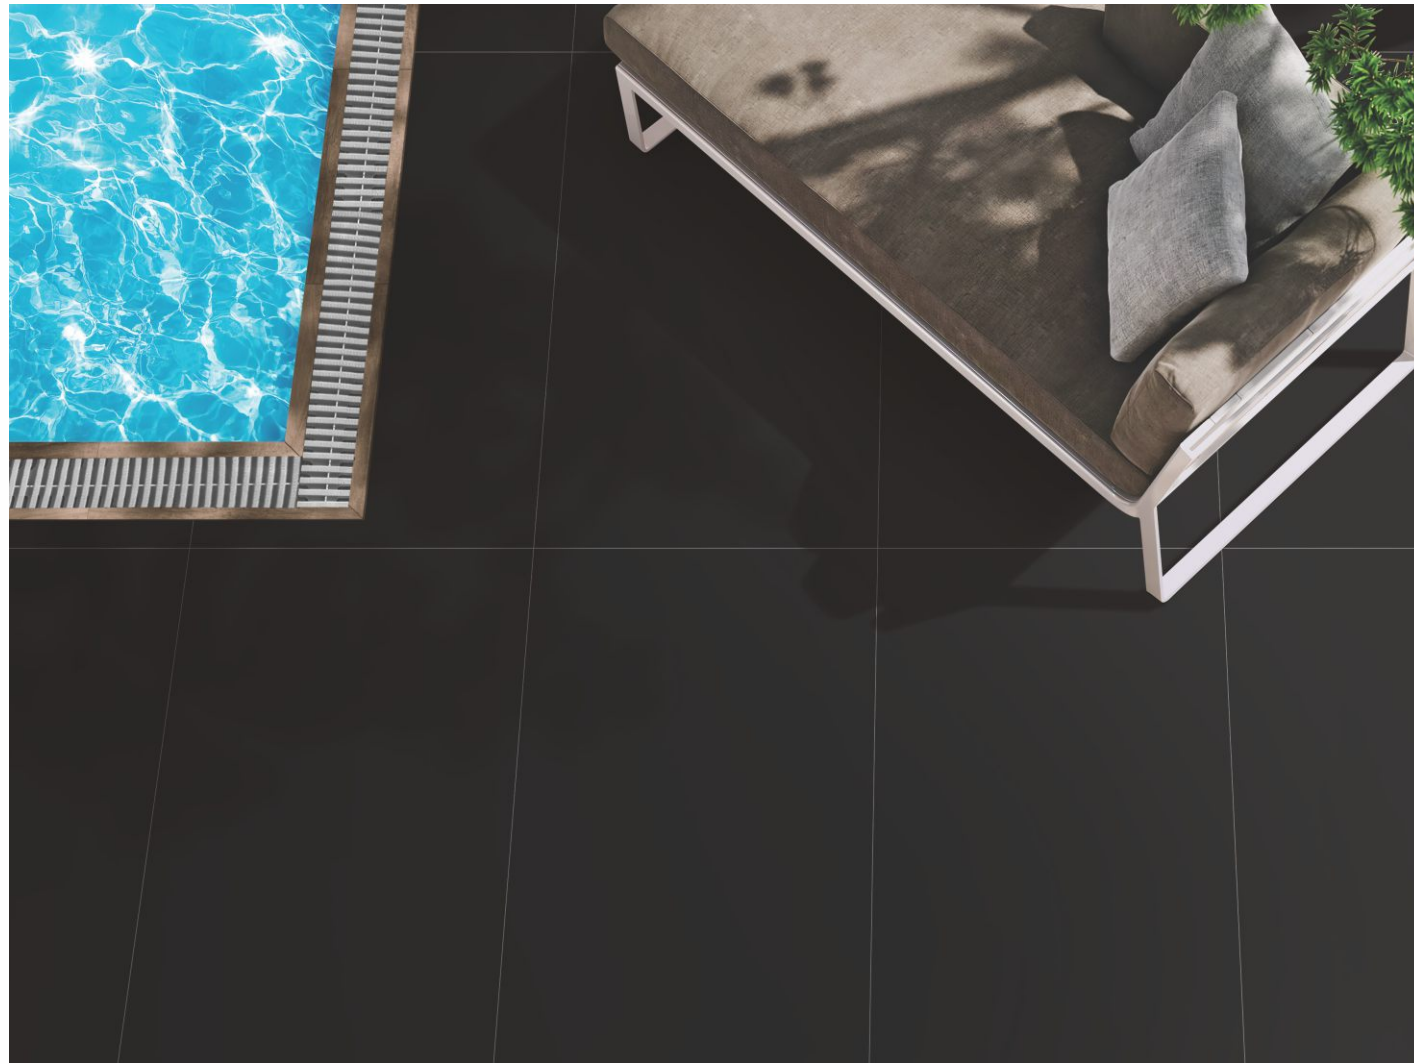

SUGGESTED PROCESS




INSTALLATION SYSTEMS



Clean the existing surface and check that the screed is level to select the right type of pedestal. The screed must be dry and cured. Prepare the chosen pedestals, cutting the ones around the edge to size and removing any unwanted wings.




मौजूदा सतह को साफ करें और जांच लें कि स्क्रीड सही प्रकार के पेडस्टल को चुनने के लिए स्तर पर है। स्क्रीड को सूखा और ठीक किया जाना चाहिए। चुने हुए पेडस्टल को तैयार करें। उन्हें आकार देने के लिए किनारे के चारों ओर काटकर तैयार करें और किसी अवांछित विंग्स को भी हटा दें।

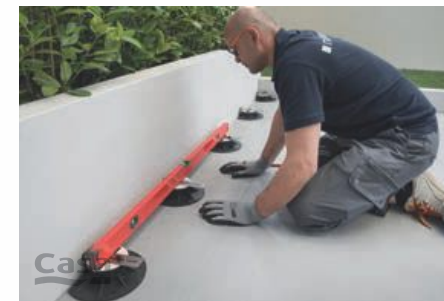

Arrange the grid of pedestals in accordance with the laying diagram, starting with those around the edge. Fit the protective tile edge clips on the pedestals against any walls.



पेडस्टल के ग्रिड को आरेख के अनुसार व्यवस्थित बिछाए, किनारे के आसपास से शुरू करें। दीवार की तरफ के पेडस्टल पर प्रोटेक्टिव टाइल एज क्लिप्स फिट करें।

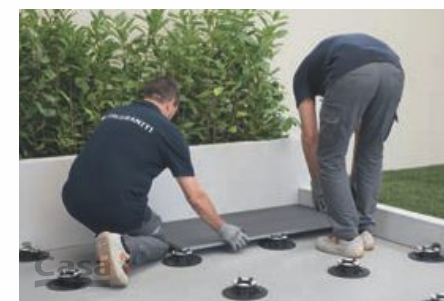

Lay the tiles on the pedestals dry. Add a pedestal in the middle of the tiles, removing the spacer wings. Systematically check the flatness and adjust the heights of the pedestals with the adjuster key to compensate for any unevenness in the substrate. A little slope of the substrate is always recommended in order to prevent water stagnation underneath the surface.




पेडस्टल पर स्लैब को सूखा बिछाए। स्लैब के बीच में एक पेडस्टल जोड़ें, स्पेसर विंग को हटाए। सबस्ट्रेट में किसी भी असमानता की भरपाई के लिए एडजस्टर की को इस्तेमाल कर के व्यवस्थित रूप से पेडस्टल की ऊंचाई और समतलता की जाँच करें। पानी का ठहराव रोकने के लिए सतह के नीचे सबस्ट्रेट का थोड़ा ढलान हमेशा अनुशंसित है।

LAYING ON GRASS



SUGGESTED PROCESS

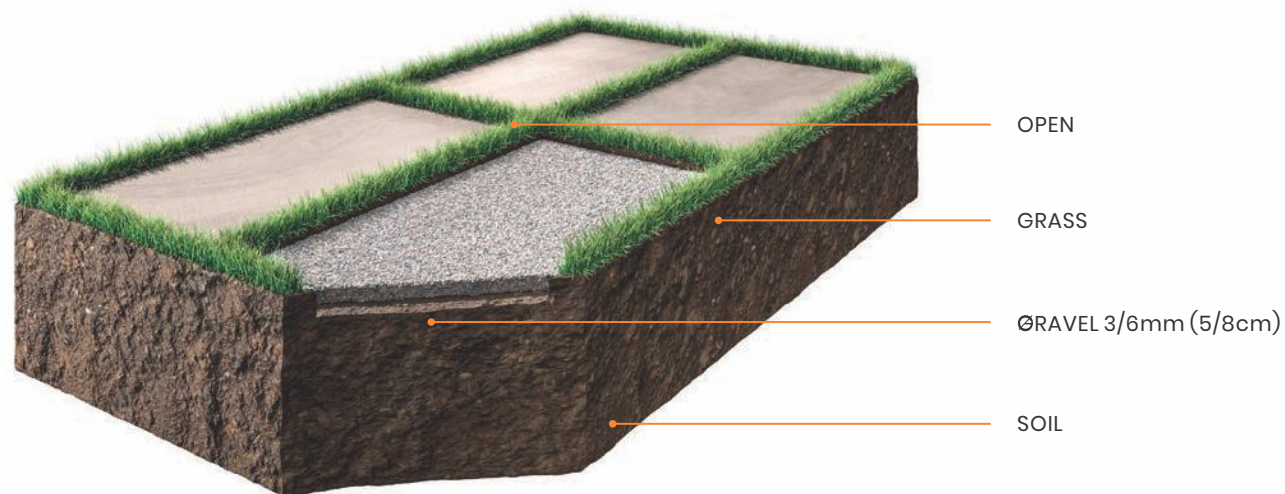

INSTALLATION SYSTEMS



Place the slabs dry on the grass and check that the gap between them is the same over the entire laying surface.



स्लैब को घास पर सुखा बिछाए और जांचें कि उनके बीच का अंतर पूरी बिछाने की सतह पर समान है।



Mark out the area of turf to be removed and dig out to a depth of at least 5 cm. Create a layer of at least 3 cm of gravel (diam. 3/6 mm).




हटाए जाने वाले टर्फ के क्षेत्र को चिह्नित करें और कम से कम 5 सेमी की गहराई तक खो दें। कम से कम 3 सेमी बजरी की एक परत बनाएं (व्यास 3/6 मिमी)।



After checking that the substrate created is level, put the slabs in place and tap down gently with a rubber hammer to settle them into place and eliminate any unevenness.




बनाया गया सबस्ट्रेट स्तर होने की जाँच करने के बाद स्लैब रखें और एक रबर हथौड़े के साथ उन्हें जगह में व्यवस्थित करने के लिए धीरे से नीचे टैप करें और किसी भी तरह की असमानता को दूर करें।

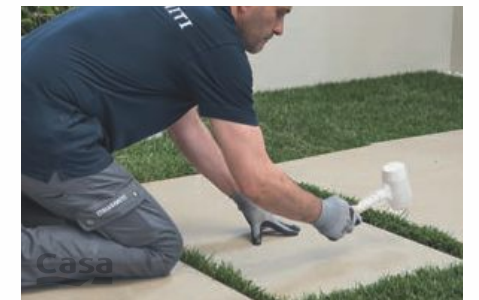

LAYING ON SCREED



SUGGESTED PROCESS

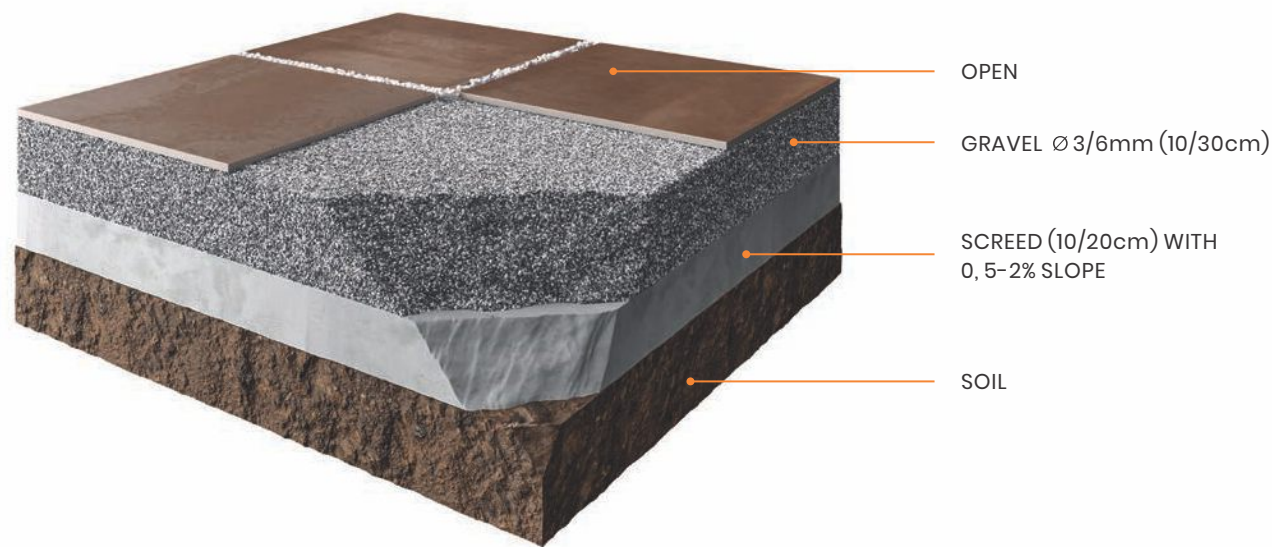

CASASTONE COLLECTION

INSTALLATION SYSTEMS



Create a layer of at least 5 cm of gravel (diam. 3/6 mm) on the existing substrate. Level the surface with a straightedge and check the flatness.



कम से कम 5 सेमी बजरी की परत (डायम 3/6 मिमी) मौजूदा सबस्ट्रेट पर बनाये। सतह को स्ट्रेट एज के साथ लेवल करे और उसकी समतलता की जाँच करें।



Place the slabs dry on the gravel and check that the gap between them is the same over the entire laying surface. Tap down gently with a rubber hammer to settle them into place and eliminate any unevenness.



स्लैब को बजरी पर सूखा बिछाए और जांचें कि उनके बीच का अंतर पूरी बिछाने की सतह पर समान है। उन्हें जगह में बिछाने के लिए रबर के हथौड़े से धीरे से नीचे की ओर टैप करें और किसी भी असमानता को दूर करें।



Check the flatness of the surface created. Add gravel in the joints to level the paving. Decorative gravel larger in diameter than the type use for the substrate can also be used in the joints.



बनाई गई सतह की समतलता की जाँच करें। फर्श को समतल करने के लिए जोड़ों में बजरी डालें। सबस्ट्रेट के लिए उपयोग किए जाने वाले प्रकार की तुलना में व्यास में बड़े सजावटी बजरी का उपयोग जोड़ों में भी किया जा सकता है।

INDEX

RANGE


BASIC

PLUS


SUPER PLUS

TECH. DATA

LAYING ON SAND

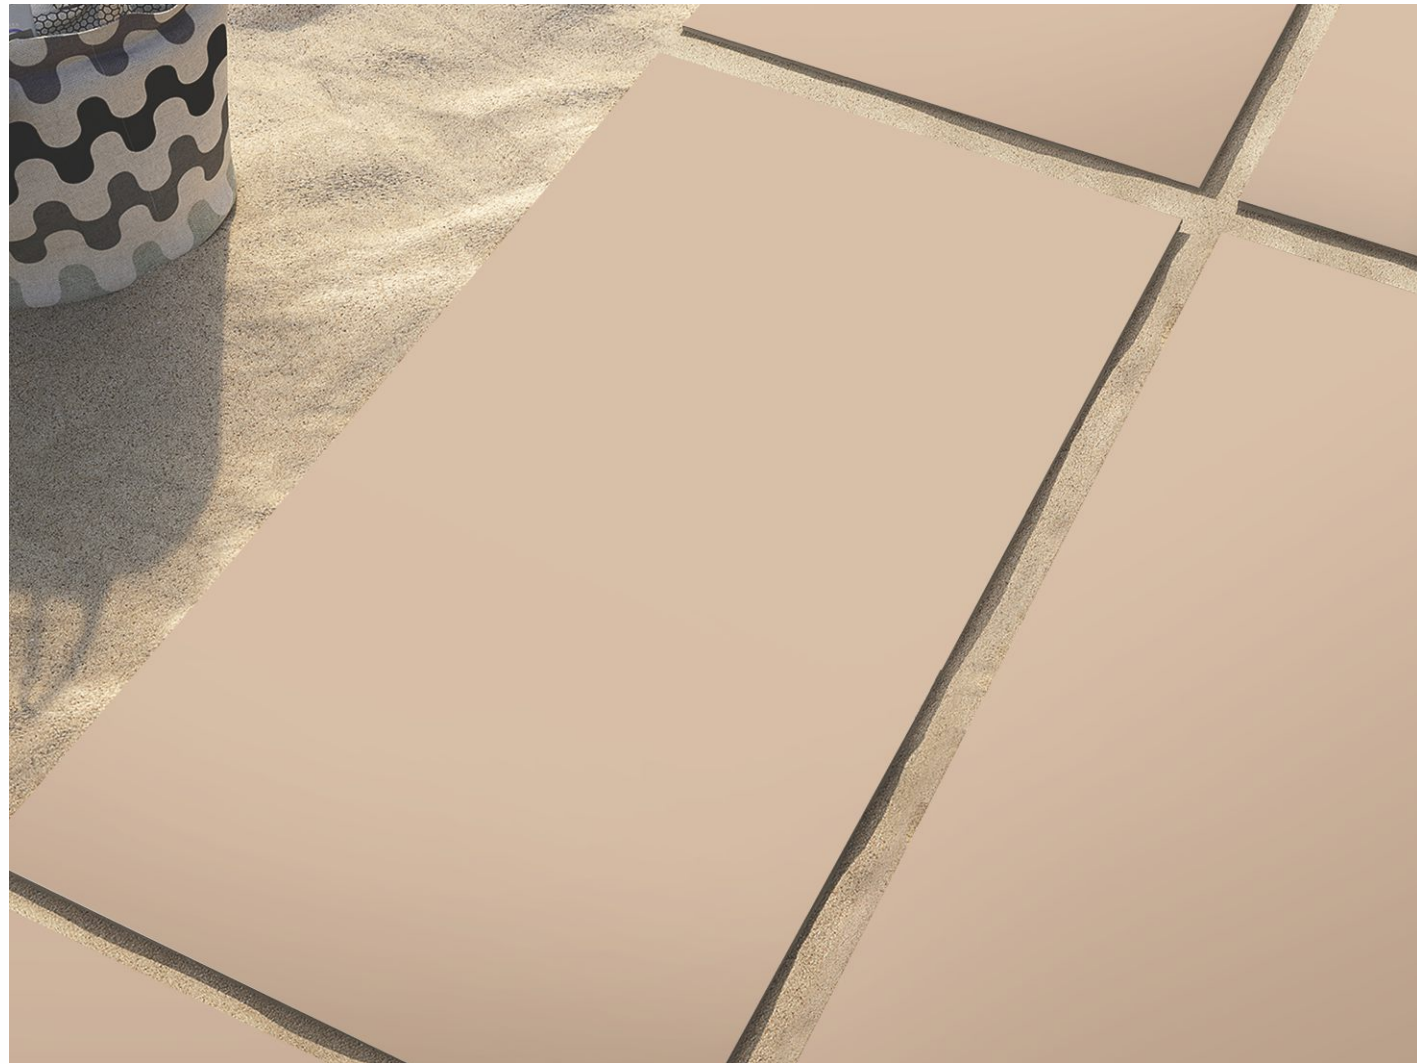

SUGGESTED PROCESS

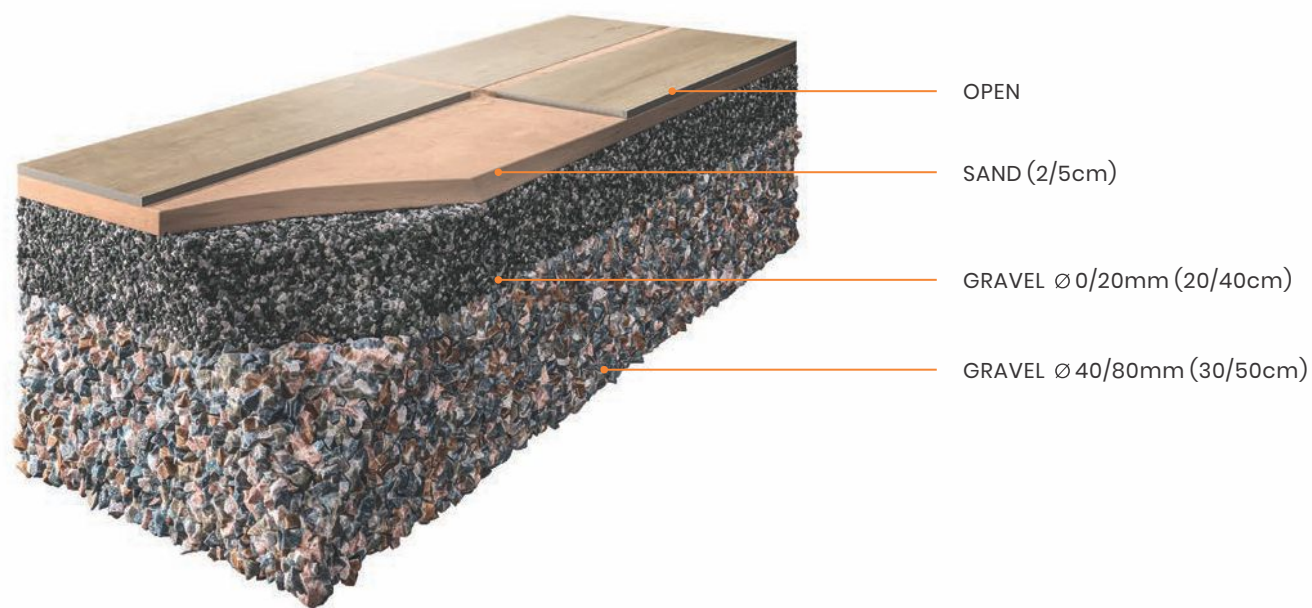

INSTALLATION SYSTEMS



Prepare a layer of sand at least 5 cm thick on the existing substrate (screed or gravel). Level the surface with a straightedge and check the flatness.

कम से कम 5 सेमी मोटी रेत की परत मौजूदा सब्सट्रेट (स्क्रीड या बजरी) पर तैयार करें। सतह को स्ट्रेट एज के साथ लेवल करें और उसकी समतलता की जाँच करें।



Place the slabs dry on the sand and check that the gap between them is the same over the entire laying surface. Tap down gently with a rubber hammer to settle them into place.

स्लैब को रेत पर सूखा बिछाए और जांचें कि उनके बीच का अंतर पूरी बिछाने की सतह पर समान है। उन्हें जगह में बिछाने के लिए रबर के हथौड़े से धीरे से नीचे की ओर टैप करें और किसी भी असमानता को दूर करें।



Add sand in the joints to level the paving. Clean the surface of the slabs.

फर्श को समतल करने के लिए जोड़ों में रेत डालें। स्लैब की सतह को साफ करें।



TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF CASA FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≤ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance (Friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

PACKING DETAILS

Collection	Size	Pieces / Box	Whight / box (approx)	Coverage Area / Box
Casastone	600x1200mm	2 Pieces	29.00kg	15.5 ft ² or 1.44 mtr ²
	600x600mm	4 Pieces	28.00kg	15.5 ft ² or 1.44 mtr ²

Disclaimer

Casa reserves the right to delete & amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colours of tiles shown in this catalogue are purely illustrative to printing process. Please refer actual sample before final selection. The details of sizes, colours and references should be verified for typographical errors.

CLEANING & MAINTENANCE

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface. For most cases only a damp cloth is sufficient for cleaning. Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine. For highly aggressive cleaning caused by some common food and substances follow the table below.

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

For more details,
check our tutorial videos
on the website and
on Youtube.




CASASTONE COLLECTION

LAYING ON SCREED




LAYING ON GRASS

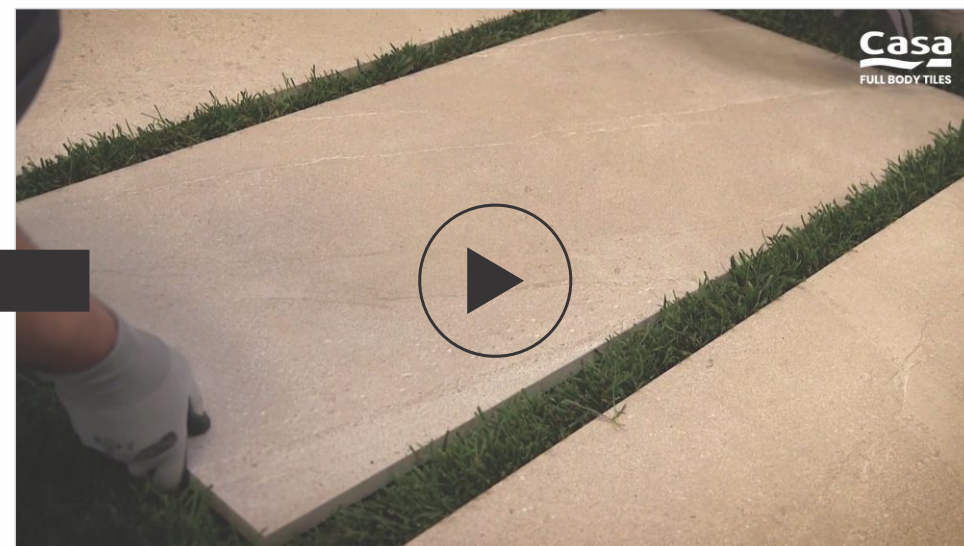

LAYING ON GRAVEL



LAYING ON SAND

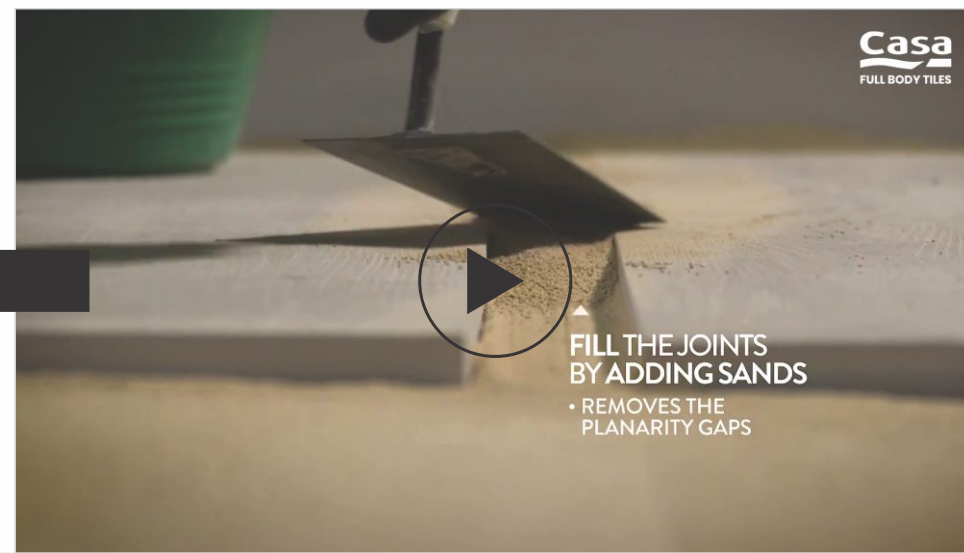

INDEX

RANGE

BASIC

PLUS

SUPER PLUS

TECH. DATA

A PREMIUM COLLECTION

Casastone
BOLD SURFACES


**CASA
DESERT**
FULL BODY TILES

CASAYARD
EXQUISITE PUNCH, INSPIRED BY NATURE

CASADECK
Heavy Duty Tiles

**CASA
POLO**
FULLBODY TILES

CASA STEP
READY TO INSTALL FULLBODY STEPS

CasaArt
— FULLBODY TILE MOSAIC —

Casa 
Cloud
DIGITAL FULLBODY TILES

[CLICK COLLECTION TO OPEN PRODUCT PDF](#)



Casagres Tiles India

Sartanpar Road,
Opposite 166 Kva Substation,
Morbi - 363 621, Gujarat, India

casa@fullbodytiles.com
fullbodytiles.com

Copyright 2023 By Casagres Tiles India
(designed By: SipI) June 2023